


# Bettis RGS F-Series

## Quarter-Turn Spring-Return (SR) and Double-Acting (DA) Pneumatic Actuators

- Output Torques to 500,000 in-lb (56,492 N·m)
- Ductile Iron or Stainless-Steel Construction
- Temperatures from -60°F to 450°F (-51°C to 232°C)
- Double-Acting and Spring-Return Models
- High Cycle Life, High Speed, High Reliability



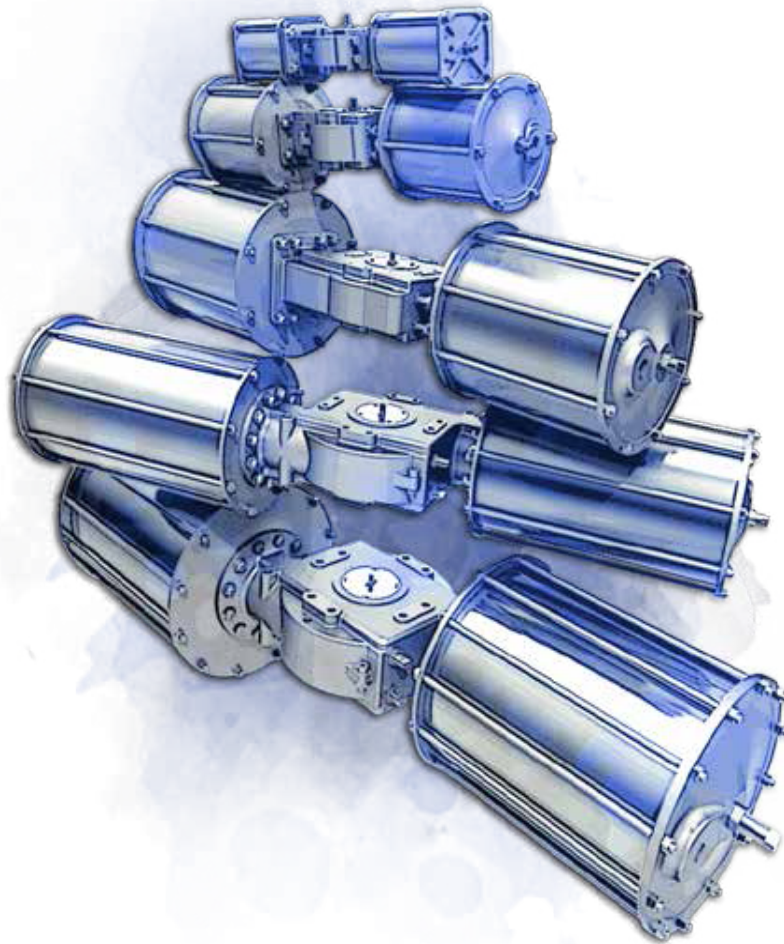

## Table of Contents

|  |           |
|--|-----------|
| <b>Section 1: Operation and Piping .....</b>                                     | <b>4</b>  |
| <b>Section 2: Piping Guidelines .....</b>  | <b>5</b>  |
| <b>Section 3: Dimension and Technical Data .....</b>                             | <b>7</b>  |
| Dimension and Technical Data (Imperial, Inches).....                             | 8         |
| Dimension and Technical Data (Metric, Millimeters) .....                         | 12        |
| <b>Section 4: Pressure Equipment Directive (PED) Category Determination.....</b> | <b>17</b> |
| <b>Section 5: Output Torque Data .....</b>                                       | <b>19</b> |
| Double-Acting (Imperial, in-lb) .....  | 18        |
| Double-Acting (Metric, N·m).....   | 19        |
| Spring-Return (Imperial, in-lb) .....  | 20        |
| Spring-Return (Metric, N·m).....   | 24        |
| <b>Section 6: Parts Diagram and Materials of Construction .....</b>              | <b>29</b> |
| Double-Acting .....  | 28        |
| Spring-Return .....  | 30        |
| <b>Section 7: Bettis RGS F-Series Actuator Model Number Matrix.....</b>          | <b>33</b> |

## Operation and Piping


Bettis RGS F-Series actuators may be operated with instrument air, hydraulic fluid, water, or other power gases and fluids. Always ensure that the materials of construction are compatible with the application and that the pressure does not exceed the maximum allowable.

All Bettis actuators are shipped in the Fail-Close or Left-Hand orientation unless ordered as Fail-Open or Right-Hand. The mode of operation may be reversed in the field simply by turning the actuator top-side down.


- 1. Fail-Close (Left-Hand):** pressure on the end cap port(s) pushes the piston(s) inward resulting in counterclockwise rotation. Exhaustion of air allows springs to push outward on the piston and cause clockwise rotation.
- 2. Fail-Open (Right-Hand):** pressure on the end cap port(s) pushes the piston(s) inward resulting in clockwise rotation. Exhaustion of air allows springs push outward on the piston and cause counterclockwise rotation.
- 3. Double-Acting (Left-Hand):** pressure on the end cap port(s) pushes the piston(s) inward and causes counterclockwise rotation. Pressure on the body port pushes outward on the piston(s) and cause clockwise rotation.
- 4. Double-Acting (Right-Hand):** pressure on the end cap port(s) pushes the piston(s) inward and causes clockwise rotation. Pressure on the body port pushes outward on the piston(s) and cause counterclockwise rotation.

## Piping Guidelines


1. Both end cap pressure ports P1 and P2 must be pressurized simultaneously for proper operation.
2. Pressure ports P1 and P2 are typically connected together and powered by a single air pathway.
3. For all Double-Acting (DA) models, both base plate pressure ports P3 and P4 must be pressurized simultaneously for proper operation. These ports are not present on Spring-Return (SR) models.

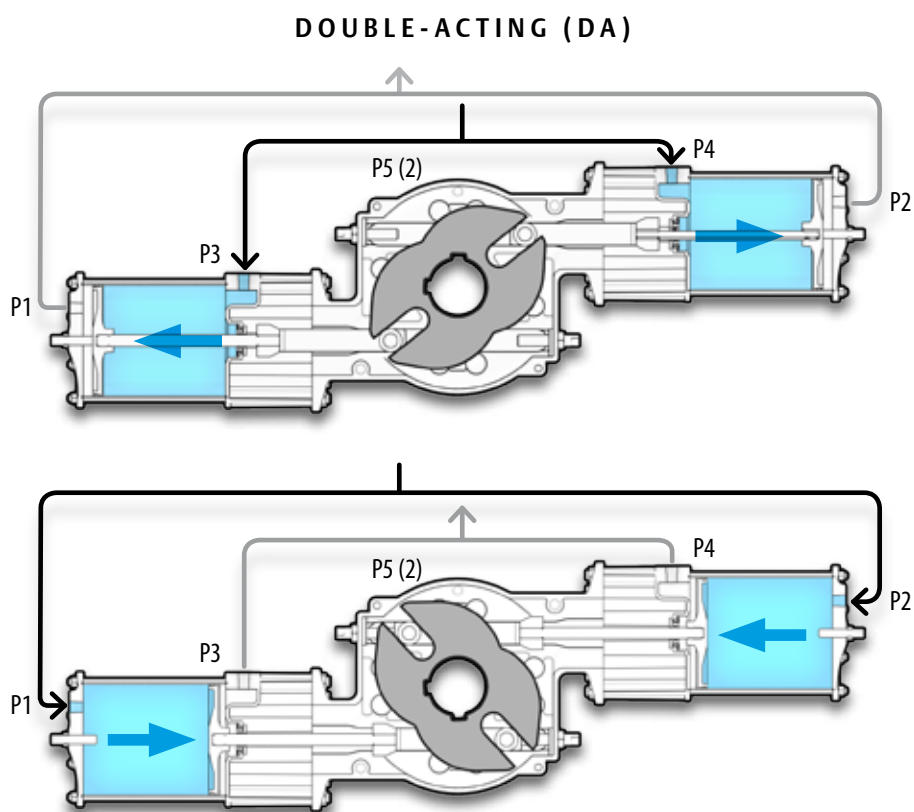


4. Pressure ports P3 and P4 are typically connected together and powered by a single pathway. Body ports P5 and P6 (shown in dimensional drawing on page 6) are breather ports which should be fitted with a strainer on SR models and may be plugged on DA models.

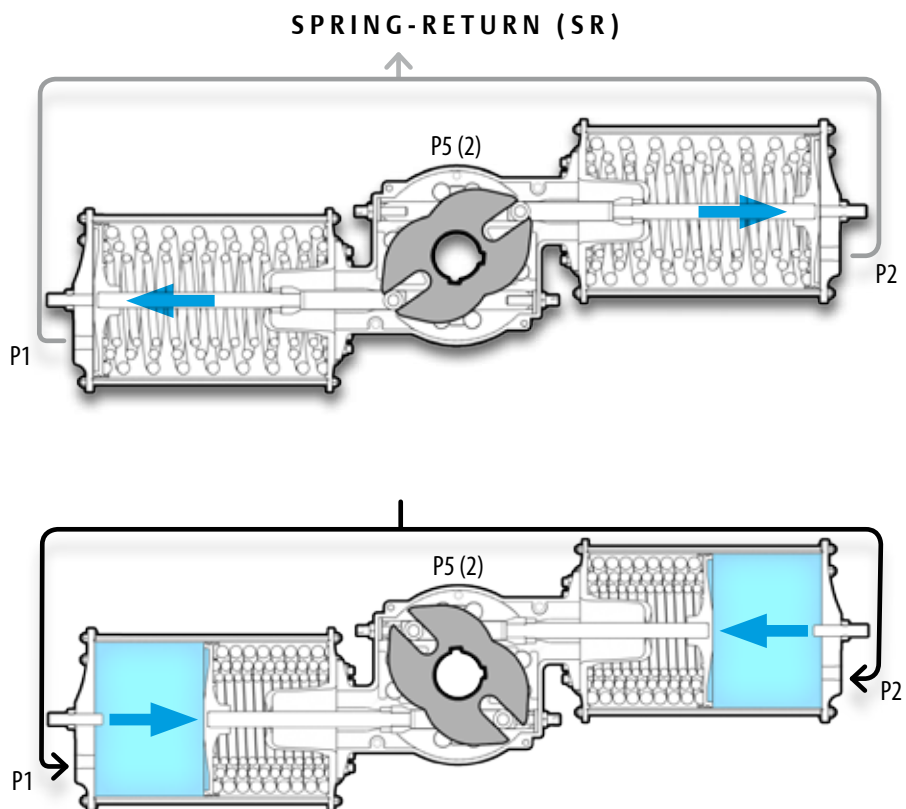


## Dimension and Technical Data

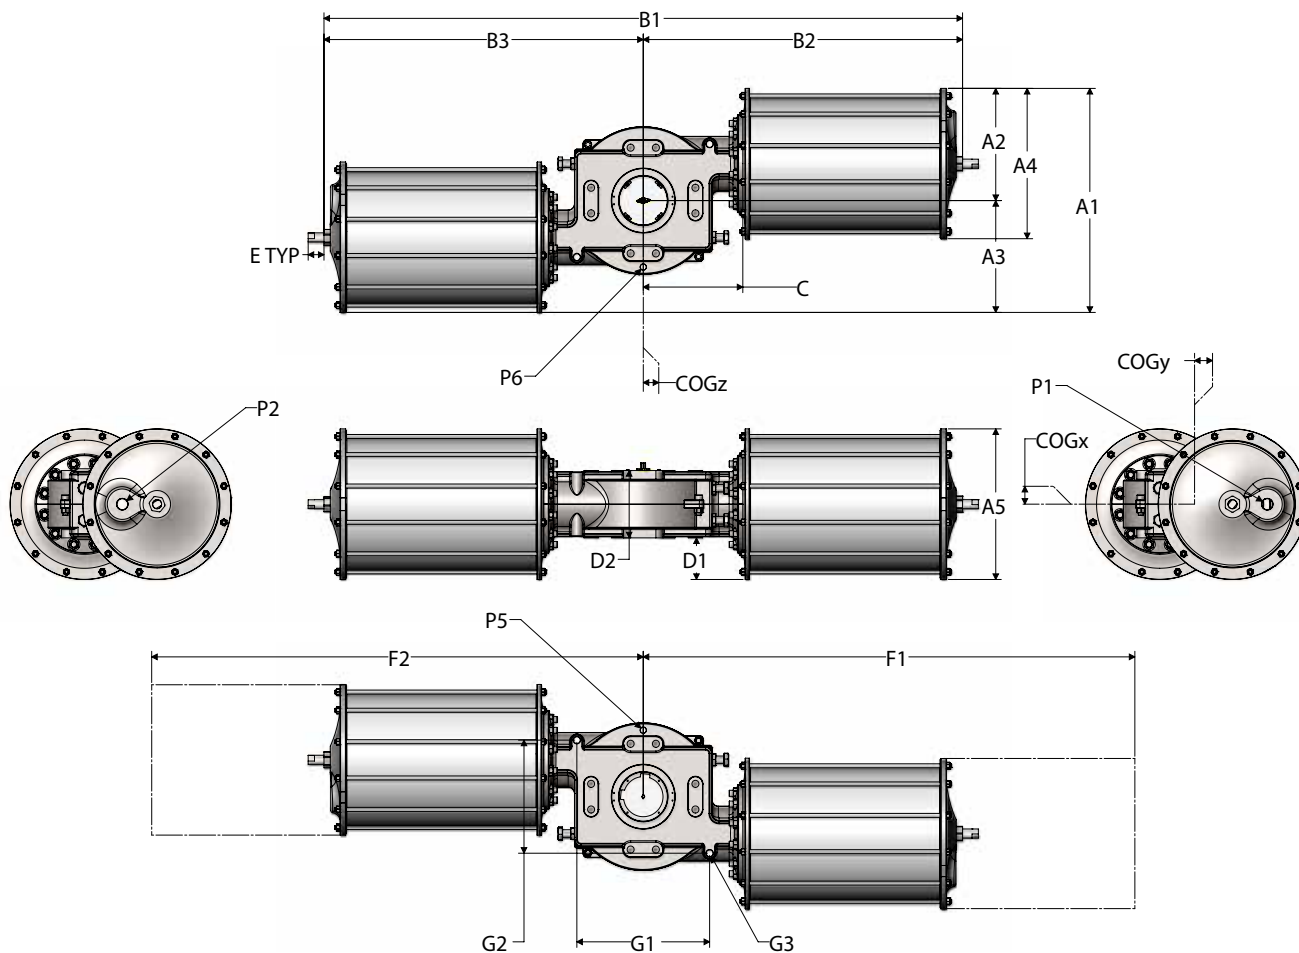


NAMUR TOP HAT  
DIMENSIONS

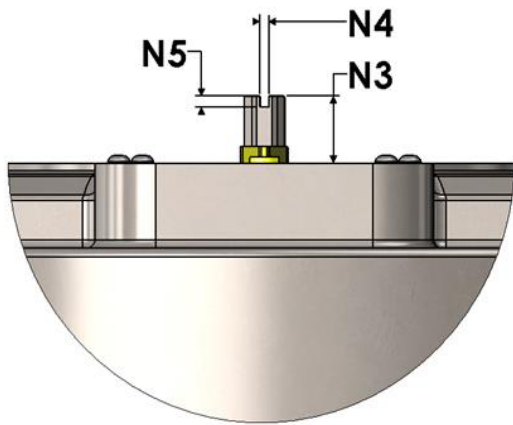

MOUNTING  
DIMENSIONS

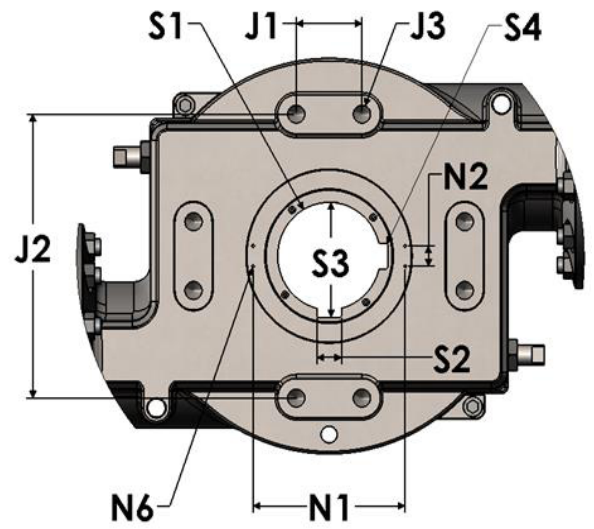

DIMENSIONS BELOW FOR  
DOUBLE ACTING MODELS ONLY

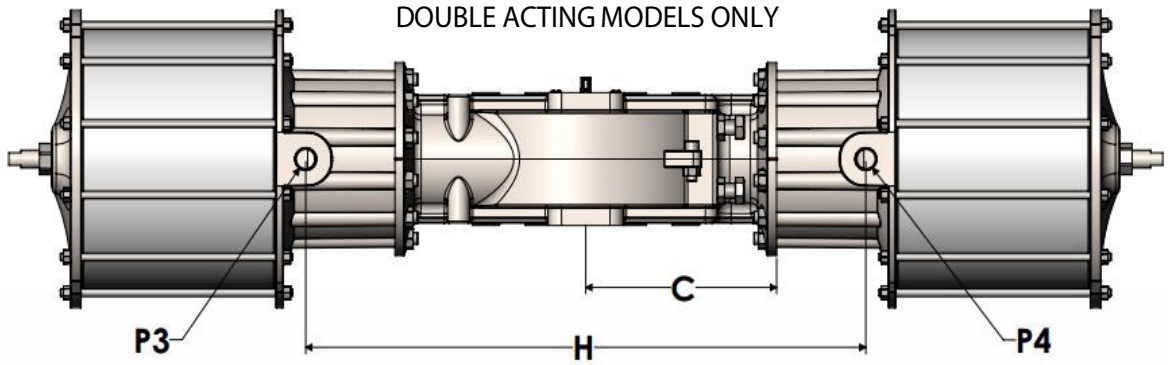



## Dimension and Technical Data (Imperial, Inches)

| ENVELOPE DIMENSIONS  |        | 2200  |       | 2250  |       |       |       | 2300  |       |       |       |
|----------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                      |        | DA06  | SR06  | DA06  | DA08  | SR08  | SR10  | DA08  | DA10  | DA12  | SR12  |
| Width Total          | A1     | 10.50 | 10.50 | 10.50 | 13.19 | 13.19 | 17.50 | 14.80 | 18.50 | 20.70 | 20.80 |
| Width Side 1         | A2     | 5.25  | 5.25  | 5.25  | 6.59  | 6.59  | 8.75  | 7.40  | 9.25  | 10.35 | 10.40 |
| Width Side 2         | A3     | 5.25  | 5.25  | 5.25  | 6.59  | 6.59  | 8.75  | 7.40  | 9.25  | 10.35 | 10.40 |
| Width Cylinder       | A4     | 6.50  | 6.50  | 6.50  | 8.75  | 8.75  | 12.50 | 8.75  | 12.50 | 14.80 | 14.80 |
| Height Cylinder      | A5     | 6.50  | 6.50  | 6.50  | 8.75  | 8.75  | 12.50 | 8.75  | 12.50 | 14.80 | 14.80 |
| Length Total         | B1     | 31.40 | 37.20 | 40.20 | 41.40 | 43.40 | 45.00 | 47.00 | 48.50 | 49.00 | 58.00 |
| Length Side 1        | B2     | 15.70 | 18.60 | 20.10 | 20.70 | 21.70 | 22.50 | 23.50 | 24.20 | 24.50 | 29.00 |
| Length Side 2        | B3     | 15.70 | 18.60 | 20.10 | 20.70 | 21.70 | 22.50 | 23.50 | 24.20 | 24.50 | 29.00 |
| Flange Distance      | C      | 6.38  | 6.38  | 7.41  | 7.41  | 7.41  | 7.41  | 10.19 | 12.50 | 12.00 | 10.19 |
| Flange Depth         | D1     | 1.22  | 1.22  | 0.05  | 1.57  | 1.44  | 3.44  | 1.20  | 3.07  | 4.21  | 4.21  |
| Body Depth           | D2     | 4.10  | 4.10  | 5.60  | 5.60  | 5.60  | 5.60  | 6.40  | 6.40  | 6.40  | 6.40  |
| Stop Extension       | E TYPE | 0.66  | 0.72  | 0.66  | 0.43  | 0.43  | 0.86  | 0.80  | 1.30  | 1.30  | 1.15  |
| Maint. Clearance     | F1     | 23    | 30    | 28    | 29    | 34    | 35    | 34    | 33    | 33    | 45    |
| Maint. Clearance     | F2     | 23    | 30    | 28    | 29    | 34    | 35    | 34    | 33    | 33    | 45    |
| Lifting Eye Dim X    | G1     | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  |
| Lifting Eye Dim Y    | G2     | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  |
| Lifting Eye Diameter | G3     | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  | ----  |
| P3 - P4 Distance     | H      | 14.1  | ----  | 20.0  | 19.5  | ----  | ----  | 22.8  | 25.1  | 24.1  | ----  |

| MOUNTING PATTERN |      |          |          |       |       |       |       |       |       |       |       |
|------------------|------|----------|----------|-------|-------|-------|-------|-------|-------|-------|-------|
| Pattern X        | J1   | 1.75     | 1.75     | 2.00  | 2.00  | 2.00  | 2.00  | 2.00  | 2.00  | 2.00  | 2.00  |
| Pattern Y        | J2   | 6.50     | 6.50     | 8.00  | 8.00  | 8.00  | 8.00  | 9.00  | 9.00  | 9.00  | 9.00  |
| Thread Type      | J3   | M12-1.75 | M12-1.75 | M16-2 | M16-2 | M16-2 | M16-2 | M16-2 | M16-2 | M16-2 | M16-2 |
| Thread Depth     | 0.75 | 0.75     | 0.75     | 0.75  | 0.75  | 0.75  | 0.75  | 0.75  | 0.75  | 0.75  | 0.75  |

| NAMUR PATTERN |      |        |        |        |        |        |        |        |        |        |        |
|---------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Length        | N1   | 5.118  | 5.118  | 5.118  | 5.118  | 5.118  | 5.118  | 5.118  | 5.118  | 5.118  | 5.118  |
| Width         | N2   | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  |
| Height        | N3   | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  |
| Slot Width    | N4   | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  |
| Slot Depth    | N5   | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  |
| Thread        | N6   | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 |
| Thread Depth  | 0.38 | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   |

*The namur slotted drive can be moved to the opposite side for field reversibility.*

| DRIVE DIMENSIONS    |           | 2200   |        | 2250  |       |       |       | 2300  |       |       |       |
|---------------------|-----------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
|                     |           | DA06   | SR06   | DA06  | DA08  | SR08  | SR10  | DA08  | DA10  | DA12  | SR12  |
| Shaft Bore          | <b>S1</b> | 2.000  | 2.000  | 2.000 | 2.000 | 2.000 | 2.000 | 2.500 | 2.500 | 2.500 | 2.500 |
| Key Width           | <b>S2</b> | 0.3125 | 0.3125 | 0.375 | 0.375 | 0.375 | 0.375 | 0.500 | 0.500 | 0.500 | 0.500 |
| Female Key Distance | <b>S3</b> | 2.147  | 2.147  | 2.174 | 2.174 | 2.174 | 2.174 | 2.729 | 2.729 | 2.729 | 2.729 |
| Key Corner Radius   | <b>S4</b> | 0.00   | 0.00   | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  |
| Max Engagement      |           | 3.63   | 5.13   | 5.13  | 5.13  | 5.13  | 5.88  | 5.88  | 5.87  | 5.88  | 5.87  |

Shafts have two keyways 90 degrees apart. Only one keyway is required to transmit torque. Max engagement shown with top hat. Removal of top hat allows shaft to extend through the actuator bore.

|                                 |              |      |      |      |      |      |        |      |        |        |        |
|---------------------------------|--------------|------|------|------|------|------|--------|------|--------|--------|--------|
| Air Volume (cu in)              | Body Side    | 306  | ---- | 335  | 701  | ---- | ----   | 788  | 1,071  | 1,539  | ----   |
|                                 | End Cap Side | 273  | 273  | 370  | 589  | 589  | 943    | 686  | 1,122  | 1,640  | 1,640  |
| Port Size, NPT (P1, P2, P3, P4) | Normal       | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" | 1/2"   | 1/4" | 1/2"   | 1"     | 1"     |
|                                 | Max          | 1"   | 1"   | 1"   | 1"   | 1"   | 1 1/2" | 1"   | 1 1/2" | 2 1/2" | 2 1/2" |
| NPT (P5, P6)                    | Std.         | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" | 1/4"   | 1/4" | 1/4"   | 1/4"   | 1/4"   |

|                   |     |      |      |      |      |      |      |      |      |      |      |
|-------------------|-----|------|------|------|------|------|------|------|------|------|------|
| Stroke Time (sec) | Min | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 |
|-------------------|-----|------|------|------|------|------|------|------|------|------|------|

Stroke time varies with supply pressure, temperature, spring rate, travel adjustment, working medium, and valve torque. Values shown with no valve resistance. Contact factory about faster stroke speed.

|                   |                  |      |      |      |      |      |      |      |      |      |      |
|-------------------|------------------|------|------|------|------|------|------|------|------|------|------|
| Center of Gravity | COG <sub>x</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|                   | COG <sub>y</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.03 | 0.00 | 0.05 | 0.13 | 0.03 |
|                   | COG <sub>z</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

|             |                |    |         |     |     |         |         |     |     |     |         |
|-------------|----------------|----|---------|-----|-----|---------|---------|-----|-----|-----|---------|
| Weight (lb) | Stainless (FS) | 90 | S1: 120 | 136 | 176 | S1: 222 | S1: 331 | 230 | 322 | 397 | S1: 560 |
|             |                |    | S2: 117 |     |     | S2: 218 | S2: 301 |     |     |     | S2: 529 |
|             |                |    | S3: 116 |     |     | S3: 216 | S3: 287 |     |     |     | S3: 496 |
|             |                |    | ----    |     |     | ----    | ----    |     |     |     | S4: 493 |
|             | Ductile (FD)   | 78 | S1: 112 | 118 | 153 | S1: 208 | S1: 265 | 200 | 280 | 345 | S1: 476 |
|             |                |    | S2: 109 |     |     | S2: 204 | S2: 235 |     |     |     | S2: 445 |
|             |                |    | S3: 108 |     |     | S3: 202 | S3: 257 |     |     |     | S3: 412 |
|             |                |    | ----    |     |     | ----    | ----    |     |     |     | S4: 409 |

|                          |        |        |        |        |        |        |        |        |        |        |        |
|--------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Max Rated Torque (in-lb) | 10,000 | 10,000 | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 40,000 | 40,000 | 40,000 | 40,000 |
| Max Pressure (psig)      | 150    | 150    | 150    | 150    | 150    | 120    | 150    | 120    | 120    | 120    | 120    |

| TEMPERATURE LIMITS |                |                |
|--------------------|----------------|----------------|
| Low                | Standard       | High           |
| -60°F to 185°F     | -20°F to 185°F | -20°F to 400°F |

Environmental temperature requirements may limit the use of certain trim materials. Temperature ranges may be extended with proper insulation. Ductile iron units may be used in low temperature (less than -28°C), but stroke speed should be limited to prevent brittle fracture. Extended temperature ranges available upon request.

| ENVELOPE DIMENSIONS  |        | 2375  |       |       | 2488  |       |       |       | 2575   |       |       |       |        |
|----------------------|--------|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|--------|
|                      |        | DA10  | DA12  | SR16  | DA12  | DA16  | SR16  | SR20  | DA12   | DA16  | DA20  | SR20  | SR24   |
| Width Total          | A1     | 20.25 | 22.30 | 26.50 | 24.20 | 28.50 | 28.50 | 33.20 | 26.75  | 30.22 | 34.96 | 35.00 | 39.00  |
| Width Side 1         | A2     | 10.13 | 11.15 | 13.25 | 12.10 | 14.25 | 14.25 | 16.60 | 13.375 | 15.11 | 17.48 | 17.50 | 19.50  |
| Width Side 2         | A3     | 10.13 | 11.15 | 13.25 | 12.10 | 14.25 | 14.25 | 16.60 | 13.375 | 15.11 | 17.48 | 17.50 | 19.50  |
| Width Cylinder       | A4     | 12.70 | 14.80 | 19.00 | 14.80 | 19.00 | 18.70 | 23.40 | 15.25  | 18.7  | 23.4  | 23.40 | 27.40  |
| Height Cylinder      | A5     | 12.70 | 14.80 | 19.00 | 14.80 | 19.00 | 18.75 | 23.40 | 15.25  | 18.75 | 23.4  | 23.40 | 27.40  |
| Length Total         | B1     | 58.00 | 58.60 | 69.00 | 69.00 | 70.80 | 90.20 | 92.60 | 86     | 86    | 90.2  | 99.00 | 101.00 |
| Length Side 1        | B2     | 29.00 | 29.30 | 34.50 | 34.50 | 35.40 | 45.10 | 46.30 | 43     | 43    | 45.1  | 49.50 | 50.50  |
| Length Side 2        | B3     | 29.00 | 29.30 | 34.50 | 34.50 | 35.40 | 45.10 | 46.30 | 43     | 43    | 45.1  | 49.50 | 50.50  |
| Flange Distance      | C      | 11.06 | 11.06 | 11.06 | 13.13 | 13.13 | 13.13 | 13.13 | 15.75  | 15.75 | 15.75 | 15.75 | 15.75  |
| Flange Depth         | D1     | 2.90  | 3.90  | 6.10  | 3.00  | 5.10  | 5.10  | 7.50  | 2.52   | 4.066 | 6.5   | 6.50  | 8.50   |
| Body Depth           | D2     | 6.90  | 6.90  | 6.90  | 8.50  | 8.50  | 8.50  | 8.50  | 10.5   | 10.5  | 10.5  | 10.50 | 10.50  |
| Stop Extension       | E TYPE | 0.63  | 1.35  | 1.50  | 1.30  | 1.50  | 1.50  | 2.50  | 1.24   | 2.3   | 2.5   | 3.50  | 4.75   |
| Maint. Clearance     | F1     | 40    | 40    | 55    | 48    | 49    | 74    | 75    | 59     | 58    | 61    | 80    | 81     |
| Maint. Clearance     | F2     | 40    | 40    | 55    | 48    | 49    | 74    | 75    | 59     | 58    | 61    | 80    | 81     |
| Lifting Eye Dim X    | G1     | 12.26 | 12.26 | 12.29 | 9.00  | 9.00  | 9.00  | 9.00  | 9.91   | 9.91  | 9.91  | 9.91  | 9.91   |
| Lifting Eye Dim Y    | G2     | 6.38  | 6.38  | 6.38  | 7.30  | 7.30  | 7.30  | 7.30  | 8.83   | 8.83  | 8.83  | 8.83  | 8.83   |
| Lifting Eye Diameter | G3     | 1.13  | 1.13  | 1.13  | 0.94  | 0.94  | 0.94  | 0.94  | 1.06   | 1.06  | 1.06  | 1.06  | 1.06   |
| P3 - P4 Distance     | H      | 30.2  | 29.7  | ----  | 34.5  | 35.2  | ----  | ----  | 44.1   | 47.0  | 46.2  | ----  | ----   |

**MOUNTING PATTERN**

|              |      |         |         |         |       |       |       |       |         |         |         |         |         |
|--------------|------|---------|---------|---------|-------|-------|-------|-------|---------|---------|---------|---------|---------|
| Pattern X    | J1   | 2.50    | 2.50    | 2.50    | 3.00  | 3.00  | 3.00  | 3.00  | 4.00    | 4.00    | 4.00    | 4.00    | 4.00    |
| Pattern Y    | J2   | 11.00   | 11.00   | 11.00   | 14.00 | 14.00 | 14.00 | 14.00 | 16.50   | 16.50   | 16.50   | 16.50   | 16.50   |
| Thread Type  | J3   | M20-2.5 | M20-2.5 | M20-2.5 | M24-3 | M24-3 | M24-3 | M24-3 | M30-3.5 | M30-3.5 | M30-3.5 | M30-3.5 | M30-3.5 |
| Thread Depth | 1.00 | 1.00    | 1.00    | 1.50    | 1.50  | 1.50  | 1.50  | 1.5   | 1.5     | 1.5     | 1.5     | 1.5     | 1.5     |

**NAMUR PATTERN**

|              |      |        |        |        |        |        |        |        |        |        |        |        |        |
|--------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Length       | N1   | 5.906  | 5.906  | 5.906  | 7.480  | 7.480  | 7.480  | 7.480  | 9.252  | 9.252  | 9.252  | 9.252  | 9.252  |
| Width        | N2   | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  |
| Height       | N3   | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  | 1.181  |
| Slot Width   | N4   | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  | 0.157  |
| Slot Depth   | N5   | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  | 0.197  |
| Thread       | N6   | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 |
| Thread Depth | 0.38 | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   | 0.38   |

*The namur slotted drive can be moved to the opposite side for field reversibility.*

| DRIVE DIMENSIONS    |           | 2375  |       |       | 2488  |       |       |       | 2575  |       |       |       |       |
|---------------------|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                     |           | DA10  | DA12  | SR16  | DA12  | DA16  | SR16  | SR20  | DA12  | DA16  | DA20  | SR20  | SR24  |
| Shaft Bore          | <b>S1</b> | 3.500 | 3.500 | 3.500 | 4.750 | 4.750 | 4.750 | 4.750 | 6.250 | 6.250 | 6.250 | 6.250 | 6.250 |
| Key Width           | <b>S2</b> | 0.500 | 0.500 | 0.500 | 1.250 | 1.250 | 1.250 | 1.250 | 1.500 | 1.500 | 1.500 | 1.500 | 1.500 |
| Female Key Distance | <b>S3</b> | 3.729 | 3.729 | 3.729 | 5.120 | 5.120 | 5.120 | 5.120 | 6.690 | 6.690 | 6.690 | 6.690 | 6.690 |
| Key Corner Radius   | <b>S4</b> | 0.00  | 0.00  | 0.00  | 0.06  | 0.06  | 0.06  | 0.06  | 0.13  | 0.13  | 0.13  | 0.13  | 0.13  |
| Max Engagement      |           | 6.38  | 6.38  | 6.38  | 8.00  | 8.00  | 8.00  | 8.00  | 10.00 | 10.00 | 10.00 | 10.00 | 10.00 |

Shafts have two keyways 90 degrees apart. Only one keyway is required to transmit torque. Max engagement shown with top hat. Removal of top hat allows shaft to extend through the actuator bore.

|                                 |              |        |        |        |        |        |        |        |        |        |        |        |        |
|---------------------------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Air Volume (cu in)              | Body Side    | 1,305  | 1,913  | ----   | 2,395  | 4,393  | ----   | ----   | 2,911  | 5,114  | 8,260  | ----   | ----   |
|                                 | End Cap Side | 1,344  | 2,033  | 3,607  | 2,604  | 4,613  | 4,613  | 7,273  | 3,055  | 5,407  | 8,518  | 8,518  | 12,403 |
| Port Size, NPT (P1, P2, P3, P4) | Normal       | 1/2"   | 1"     | 1 1/2" | 1"     | 1 1/2" | 1 1/2" | 1 1/2" | 1"     | 1 1/2" | 1 1/2" | 1 1/2" | 1 1/2" |
|                                 | Max          | 1 1/2" | 2 1/2" | 3"     | 2 1/2" | 3"     | 3"     | 3"     | 2 1/2" | 3"     | 3"     | 3"     | 4"     |
| NPT (P5, P6)                    | Std.         | 3/8"   | 3/8"   | 3/8"   | 1/2"   | 1/2"   | 1/2"   | 1/2"   | 3/4"   | 3/4"   | 3/4"   | 3/4"   | 3/4"   |

|                   |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Stroke Time (sec) | Min | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

Stroke time varies with supply pressure, temperature, spring rate, travel adjustment, working medium, and valve torque. Values shown with no valve resistance. Contact factory about faster stroke speed.

|                   |                  |      |      |      |      |      |      |      |      |      |      |      |      |
|-------------------|------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Center of Gravity | COG <sub>x</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|                   | COG <sub>y</sub> | 0.03 | 0.08 | 0.02 | 0.10 | 0.10 | 0.00 | 0.00 | 0.00 | 0.00 | 0.10 | 0.00 | 0.00 |
|                   | COG <sub>z</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.10 | 0.00 | 0.00 |

|             |                |     |      |          |     |      |          |          |       |       |       |          |          |
|-------------|----------------|-----|------|----------|-----|------|----------|----------|-------|-------|-------|----------|----------|
| Weight (lb) | Stainless (FS) | 439 | 512  | S1: 1009 | 702 | 916  | S1: 1623 | S1: 2104 | 1,143 | 1,329 | 1,759 | S1: 3049 | S1: 4243 |
|             |                |     |      | S2: 967  |     |      | S2: 1383 | S2: 1864 |       |       |       | S2: 2829 | S2: 4017 |
|             |                |     |      | S3: 893  |     |      | S3: 1227 | S3: 1708 |       |       |       | S3: 2671 | S3: 3845 |
|             |                |     |      | S4: 913  |     |      | ----     | ----     |       |       |       | S4: 2515 | S4: 3553 |
|             |                |     |      | S5: 797  |     |      | ----     | ----     |       |       |       | ----     | S5: 3347 |
|             | Ductile (FD)   | 382 | 445  | S1: 918  | 617 | 789  | S1: 1426 | S1: 1809 | 1,015 | 1,161 | 1,521 | S1: 2837 | S1: 3809 |
|             |                |     |      | S2: 876  |     |      | S2: 1186 | S2: 1569 |       |       |       | S2: 2617 | S2: 3583 |
|             |                |     |      | S3: 802  |     |      | S3: 1030 | S3: 1413 |       |       |       | S3: 2459 | S3: 3411 |
|             |                |     |      | S4: 822  |     |      | ----     | ----     |       |       |       | S4: 2303 | S4: 3119 |
|             |                |     |      | S5: 706  |     |      | ----     | ----     |       |       |       | ----     | S5: 2913 |
|             |                |     | ---- |          |     | ---- | ----     |          |       |       | ----  | S6: 2741 |          |

|                          |        |        |        |         |         |         |         |         |         |         |         |         |         |
|--------------------------|--------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Max Rated Torque (in-lb) | 80,000 | 80,000 | 80,000 | 200,000 | 200,000 | 200,000 | 200,000 | 500,000 | 500,000 | 500,000 | 500,000 | 500,000 | 500,000 |
| Max Pressure (psig)      | 120    | 120    | 120    | 120     | 120     | 120     | 120     | 120     | 120     | 120     | 120     | 120     | 110     |

| TEMPERATURE LIMITS |                |                |
|--------------------|----------------|----------------|
| Low                | Standard       | High           |
| -60°F to 185°F     | -20°F to 185°F | -20°F to 400°F |

Environmental temperature requirements may limit the use of certain trim materials. Temperature ranges may be extended with proper insulation. Ductile iron units may be used in low temperature (less than -28°C), but stroke speed should be limited to prevent brittle fracture. Extended temperature ranges available upon request.

## Dimension and Technical Data (Metric, Millimeters)

| ENVELOPE DIMENSIONS  |        | 2200  |       | 2250   |        |        |        | 2300   |        |        |        |
|----------------------|--------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
|                      |        | DA06  | SR06  | DA06   | DA08   | SR08   | SR10   | DA08   | DA10   | DA12   | SR12   |
| Width Total          | A1     | 266.7 | 266.7 | 266.7  | 334.9  | 334.9  | 444.5  | 375.9  | 469.9  | 525.8  | 528.3  |
| Width Side 1         | A2     | 133.4 | 133.4 | 133.4  | 167.4  | 167.4  | 222.3  | 188.0  | 235.0  | 262.9  | 264.2  |
| Width Side 2         | A3     | 133.4 | 133.4 | 133.4  | 167.4  | 167.4  | 222.3  | 188.0  | 235.0  | 262.9  | 264.2  |
| Width Cylinder       | A4     | 165.1 | 165.1 | 165.1  | 222.3  | 222.3  | 317.5  | 222.3  | 317.5  | 375.9  | 375.9  |
| Height Cylinder      | A5     | 165.1 | 165.1 | 165.1  | 222.3  | 222.3  | 317.5  | 222.3  | 317.5  | 375.9  | 375.9  |
| Length Total         | B1     | 797.6 | 944.9 | 1021.1 | 1051.6 | 1102.4 | 1143.0 | 1193.8 | 1231.9 | 1244.6 | 1473.2 |
| Length Side 1        | B2     | 398.8 | 472.4 | 510.5  | 525.8  | 551.2  | 571.5  | 596.9  | 614.7  | 622.3  | 736.6  |
| Length Side 2        | B3     | 398.8 | 472.4 | 510.5  | 525.8  | 551.2  | 571.5  | 596.9  | 614.7  | 622.3  | 736.6  |
| Flange Distance      | C      | 161.9 | 161.9 | 188.1  | 188.1  | 188.1  | 188.1  | 258.8  | 317.5  | 304.8  | 258.8  |
| Flange Depth         | D1     | 31.0  | 31.0  | 1.1    | 39.9   | 36.6   | 87.4   | 30.5   | 78.0   | 106.9  | 106.9  |
| Body Depth           | D2     | 104.1 | 104.1 | 142.2  | 142.2  | 142.2  | 142.2  | 162.6  | 162.6  | 162.6  | 162.6  |
| Stop Extension       | E TYPE | 16.6  | 18.3  | 16.6   | 10.9   | 10.9   | 21.8   | 20.3   | 33.0   | 33.0   | 29.2   |
| Maint. Clearance     | F1     | 576.6 | 750.8 | 720.6  | 748.0  | 870.0  | 893.6  | 851.9  | 831.3  | 843.3  | 1148.1 |
| Maint. Clearance     | F2     | 576.6 | 750.8 | 720.6  | 748.0  | 870.0  | 893.6  | 851.9  | 831.3  | 843.3  | 1148.1 |
| Lifting Eye Dim X    | G1     | ----  | ----  | ----   | ----   | ----   | ----   | ----   | ----   | ----   | ----   |
| Lifting Eye Dim Y    | G2     | ----  | ----  | ----   | ----   | ----   | ----   | ----   | ----   | ----   | ----   |
| Lifting Eye Diameter | G3     | ----  | ----  | ----   | ----   | ----   | ----   | ----   | ----   | ----   | ----   |
| P3 - P4 Distance     | H      | 358.1 | ----  | 508.0  | 495.3  | ----   | ----   | 579.1  | 637.5  | 612.1  | ----   |

| MOUNTING PATTERN |       |          |          |        |        |        |        |        |        |        |        |
|------------------|-------|----------|----------|--------|--------|--------|--------|--------|--------|--------|--------|
| Pattern X        | J1    | 44.45    | 44.45    | 50.80  | 50.80  | 50.80  | 50.80  | 50.80  | 50.80  | 50.80  | 50.80  |
| Pattern Y        | J2    | 165.10   | 165.10   | 203.20 | 203.20 | 203.20 | 203.20 | 228.60 | 228.60 | 228.60 | 228.60 |
| Thread Type      | J3    | M12-1.75 | M12-1.75 | M16-2  | M16-2  | M16-2  | M16-2  | M16-2  | M16-2  | M16-2  | M16-2  |
| Thread Depth     | 19.05 | 19.05    | 19.05    | 19.05  | 19.05  | 19.05  | 19.05  | 19.05  | 19.05  | 19.05  | 19.05  |

| NAMUR PATTERN |     |        |        |        |        |        |        |        |        |        |        |
|---------------|-----|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Length        | N1  | 130    | 130    | 130    | 130    | 130    | 130    | 130    | 130    | 130    | 130    |
| Width         | N2  | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     |
| Height        | N3  | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     |
| Slot Width    | N4  | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      |
| Slot Depth    | N5  | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      |
| Thread        | N6  | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 |
| Thread Depth  | 9.5 | 9.5    | 9.5    | 9.5    | 9.5    | 9.5    | 9.5    | 9.5    | 9.5    | 9.5    | 9.5    |

*The namur slotted drive can be moved to the opposite side for field reversibility.*

| DRIVE DIMENSIONS    |           | 2200  |       |       | 2250  |       |       |       | 2300  |       |       |
|---------------------|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|                     |           | DA06  | SR06  | DA06  | DA08  | SR08  | SR10  | DA08  | DA10  | DA12  | SR12  |
| Shaft Bore          | <b>S1</b> | 50.80 | 50.80 | 50.80 | 50.80 | 50.80 | 50.80 | 63.50 | 63.50 | 63.50 | 63    |
| Key Width           | <b>S2</b> | 7.937 | 7.937 | 9.53  | 9.53  | 9.53  | 9.53  | 12.70 | 12.70 | 12.70 | 12.70 |
| Female Key Distance | <b>S3</b> | 54.53 | 54.53 | 55.22 | 55.22 | 55.22 | 55.22 | 69.32 | 69.32 | 69.32 | 69.32 |
| Key Corner Radius   | <b>S4</b> | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  |
| Max Engagement      |           | 92    | 92    | 130   | 130   | 130   | 130   | 149   | 149   | 149   | 149   |

Shafts have two keyways 90 degrees apart. Only one keyway is required to transmit torque. Max engagement shown with top hat. Removal of top hat allows shaft to extend through the actuator bore.

|                                 |              |      |      |      |      |      |         |      |         |         |         |
|---------------------------------|--------------|------|------|------|------|------|---------|------|---------|---------|---------|
| Air Volume (liters)             | Body Side    | 5.0  | ---- | 5.0  | 11.5 | ---- | ----    | 13.0 | 17.5    | 25.2    | ----    |
|                                 | End Cap Side | 4.5  | 4.5  | 6.0  | 9.7  | 9.7  | 15.5    | 11.0 | 18.4    | 26.9    | 26.9    |
| Port Size, NPT (P1, P2, P3, P4) | Normal       | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" | 1/2"    | 1/4" | 1/2"    | 1"      | 1"      |
|                                 | Max          | 1"   | 1"   | 1"   | 1"   | 1"   | 1 1/2 " | 1"   | 1 1/2 " | 2 1/2 " | 2 1/2 " |
| NPT (P5, P6)                    | Std.         | 1/4" | 1/4" | 1/4" | 1/4" | 1/4" | 1/4"    | 1/4" | 1/4"    | 1/4"    | 1/4"    |

|                   |     |      |      |      |      |      |      |      |      |      |      |
|-------------------|-----|------|------|------|------|------|------|------|------|------|------|
| Stroke Time (sec) | Min | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 |
|-------------------|-----|------|------|------|------|------|------|------|------|------|------|

Stroke time varies with supply pressure, temperature, spring rate, travel adjustment, working medium, and valve torque. Values shown with no valve resistance. Contact factory about faster stroke speed.

|                   |                  |      |      |      |      |      |      |      |      |      |      |
|-------------------|------------------|------|------|------|------|------|------|------|------|------|------|
| Center of Gravity | COG <sub>x</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|                   | COG <sub>y</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.76 | 0.00 | 1.27 | 3.30 | 0.76 |
|                   | COG <sub>z</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

|             |                |    |        |    |    |         |         |     |     |     |         |
|-------------|----------------|----|--------|----|----|---------|---------|-----|-----|-----|---------|
| Weight (lb) | Stainless (FS) | 41 | S1: 54 | 62 | 80 | S1: 101 | S1: 150 | 104 | 146 | 180 | S1: 254 |
|             |                |    | S2: 53 |    |    | S2: 99  | S2: 137 |     |     |     | S2: 240 |
|             |                |    | S3: 53 |    |    | S3: 98  | S3: 130 |     |     |     | S3: 225 |
|             |                |    | ----   |    |    | ----    | ----    |     |     |     | S4: 224 |
|             | Ductile (FD)   | 36 | S1: 51 | 54 | 69 | S1: 94  | S1: 120 | 91  | 127 | 156 | S1: 216 |
|             |                |    | S2: 49 |    |    | S2: 93  | S2: 107 |     |     |     | S2: 202 |
|             |                |    | S3: 49 |    |    | S3: 92  | S3: 117 |     |     |     | S3: 187 |
|             |                |    | ----   |    |    | ----    | ----    |     |     |     | S4: 186 |

|                        |       |       |       |       |       |       |       |       |       |       |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Max Rated Torque (N-m) | 1,130 | 1,130 | 2,260 | 2,260 | 2,260 | 2,260 | 4,519 | 4,519 | 4,519 | 4,519 |
| Max Pressure (bar)     | 10.34 | 10.34 | 10.34 | 10.34 | 10.34 | 8.27  | 10.34 | 8.27  | 8.27  | 8.27  |

| TEMPERATURE LIMITS |               |                |
|--------------------|---------------|----------------|
| Low                | Standard      | High           |
| -51°C to 85°C      | -28°C to 85°C | -28°C to 204°C |

Environmental temperature requirements may limit the use of certain trim materials. Temperature ranges may be extended with proper insulation. Ductile iron units may be used in low temperature (less than -28°C), but stroke speed should be limited to prevent brittle fracture. Extended temperature ranges available upon request.

| ENVELOPE DIMENSIONS  |        | 2375   |        |        | 2488   |        |        |        | 2575   |        |        |        |        |
|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|                      |        | DA10   | DA12   | SR16   | DA12   | DA16   | SR16   | SR20   | DA12   | DA16   | DA20   | SR20   | SR24   |
| Width Total          | A1     | 514.4  | 566.4  | 673.1  | 614.7  | 723.9  | 723.9  | 843.3  | 679.5  | 767.6  | 888.0  | 889.0  | 990.6  |
| Width Side 1         | A2     | 257.2  | 283.2  | 336.6  | 307.3  | 362.0  | 362.0  | 421.6  | 339.7  | 383.8  | 444.0  | 444.5  | 495.3  |
| Width Side 2         | A3     | 257.2  | 283.2  | 336.6  | 307.3  | 362.0  | 362.0  | 421.6  | 339.7  | 383.8  | 444.0  | 444.5  | 495.3  |
| Width Cylinder       | A4     | 322.6  | 375.9  | 482.6  | 375.9  | 482.6  | 475.0  | 594.4  | 387.4  | 475.0  | 594.4  | 594.4  | 696.0  |
| Height Cylinder      | A5     | 322.6  | 375.9  | 482.6  | 375.9  | 482.6  | 476.3  | 594.4  | 387.4  | 476.3  | 594.4  | 594.4  | 696.0  |
| Length Total         | B1     | 1473.2 | 1488.4 | 1752.6 | 1752.6 | 1798.3 | 2291.1 | 2352.0 | 2184.4 | 2184.4 | 2291.1 | 2514.6 | 2565.4 |
| Length Side 1        | B2     | 736.6  | 744.2  | 876.3  | 876.3  | 899.2  | 1145.5 | 1176.0 | 1092.2 | 1092.2 | 1145.5 | 1257.3 | 1282.7 |
| Length Side 2        | B3     | 736.6  | 744.2  | 876.3  | 876.3  | 899.2  | 1145.5 | 1176.0 | 1092.2 | 1092.2 | 1145.5 | 1257.3 | 1282.7 |
| Flange Distance      | C      | 280.9  | 280.9  | 280.9  | 333.4  | 333.4  | 333.4  | 333.4  | 400.1  | 400.1  | 400.1  | 400.1  | 400.1  |
| Flange Depth         | D1     | 73.7   | 99.1   | 154.9  | 76.2   | 129.5  | 129.5  | 190.5  | 64.0   | 103.3  | 165.1  | 165.1  | 215.9  |
| Body Depth           | D2     | 175.3  | 175.3  | 175.3  | 215.9  | 215.9  | 215.9  | 215.9  | 266.7  | 266.7  | 266.7  | 266.7  | 266.7  |
| Stop Extension       | E TYPE | 16.0   | 34.3   | 38.1   | 33.0   | 38.1   | 38.1   | 63.5   | 31.5   | 58.4   | 63.5   | 88.9   | 120.7  |
| Maint. Clearance     | F1     | 1007.1 | 1015.7 | 1390.7 | 1213.4 | 1236.2 | 1875.8 | 1910.3 | 1488.4 | 1483.4 | 1546.1 | 2029.7 | 2061.7 |
| Maint. Clearance     | F2     | 1007.1 | 1015.7 | 1390.7 | 1213.4 | 1236.2 | 1875.8 | 1910.3 | 1488.4 | 1483.4 | 1546.1 | 2029.7 | 2061.7 |
| Lifting Eye Dim X    | G1     | 311.4  | 311.4  | 312.2  | 228.6  | 228.6  | 228.6  | 228.6  | 251.7  | 251.7  | 251.7  | 251.7  | 251.7  |
| Lifting Eye Dim Y    | G2     | 162.1  | 162.1  | 162.1  | 185.4  | 185.4  | 185.4  | 185.4  | 224.3  | 224.3  | 224.3  | 224.3  | 224.3  |
| Lifting Eye Diameter | G3     | 28.6   | 28.6   | 28.6   | 23.7   | 23.7   | 23.7   | 23.7   | 26.9   | 26.9   | 26.9   | 26.9   | 26.9   |
| P3 - P4 Distance     | H      | 767.1  | 754.4  | ----   | 876.3  | 894.1  | ----   | ----   | 1120.9 | 1193.5 | 1174.2 | ----   | ----   |

**MOUNTING PATTERN**

|              |       |         |         |         |        |        |        |        |         |         |         |         |         |
|--------------|-------|---------|---------|---------|--------|--------|--------|--------|---------|---------|---------|---------|---------|
| Pattern X    | J1    | 63.50   | 63.50   | 63.50   | 76.20  | 76.20  | 76.20  | 76.20  | 101.60  | 101.60  | 101.60  | 101.60  | 101.60  |
| Pattern Y    | J2    | 279.40  | 279.40  | 279.40  | 355.60 | 355.60 | 355.60 | 355.60 | 419.10  | 419.10  | 419.10  | 419.10  | 419.10  |
| Thread Type  | J3    | M20-2.5 | M20-2.5 | M20-2.5 | M24-3  | M24-3  | M24-3  | M24-3  | M30-3.5 | M30-3.5 | M30-3.5 | M30-3.5 | M30-3.5 |
| Thread Depth | 25.40 | 25.40   | 25.40   | 38.10   | 38.10  | 38.10  | 38.10  | 38.1   | 38.1    | 38.1    | 38.1    | 38.1    | 1.5     |

**NAMUR PATTERN**

|              |      |        |        |        |        |        |        |        |        |        |        |        |        |
|--------------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Length       | N1   | 150    | 150    | 150    | 190    | 190    | 190    | 190    | 235    | 235    | 235    | 235    | 235    |
| Width        | N2   | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     |
| Height       | N3   | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     | 30     |
| Slot Width   | N4   | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      | 4      |
| Slot Depth   | N5   | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      | 5      |
| Thread       | N6   | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 | M5-0.8 |
| Thread Depth | 9.53 | 9.53   | 9.53   | 9.53   | 9.53   | 9.53   | 9.53   | 9.53   | 9.53   | 9.53   | 9.53   | 9.53   | 0.38   |

*The namur slotted drive can be moved to the opposite side for field reversibility.*

| DRIVE DIMENSIONS    |           | 2375  |       |       | 2488   |        |        |        | 2575   |        |        |        |        |
|---------------------|-----------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
|                     |           | DA10  | DA12  | SR16  | DA12   | DA16   | SR16   | SR20   | DA12   | DA16   | DA20   | SR20   | SR24   |
| Shaft Bore          | <b>S1</b> | 88.90 | 88.90 | 88.90 | 120.65 | 120.65 | 120.65 | 120.65 | 158.75 | 158.75 | 158.75 | 158.75 | 158.75 |
| Key Width           | <b>S2</b> | 12.70 | 12.70 | 12.70 | 31.75  | 31.75  | 31.75  | 31.75  | 38.10  | 38.10  | 38.10  | 38.10  | 38.10  |
| Female Key Distance | <b>S3</b> | 94.72 | 94.72 | 94.72 | 130.05 | 130.05 | 130.05 | 130.05 | 169.93 | 169.93 | 169.93 | 169.93 | 169.93 |
| Key Corner Radius   | <b>S4</b> | 0.00  | 0.00  | 0.00  | 1.52   | 1.52   | 1.52   | 1.52   | 3.18   | 3.18   | 3.18   | 3.18   | 3.18   |
| Max Engagement      |           | 162   | 162   | 162   | 203    | 203    | 203    | 203    | 254    | 254    | 254    | 254    | 254    |

Shafts have two keyways 90 degrees apart. Only one keyway is required to transmit torque. Max engagement shown with top hat. Removal of top hat allows shaft to extend through the actuator bore.

|                                 |              |        |        |        |        |        |        |        |        |        |        |        |        |
|---------------------------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Air Volume (liters)             | Body Side    | 21.4   | 31.3   | ----   | 39.2   | 72.0   | ----   | ----   | 47.7   | 83.8   | 135.4  | ----   | ----   |
|                                 | End Cap Side | 22.0   | 33.3   | 59.0   | 42.7   | 75.6   | 75.6   | 119.2  | 50.0   | 88.6   | 139.6  | 139.6  | 203.2  |
| Port Size, NPT (P1, P2, P3, P4) | Normal       | 1/2"   | 1"     | 1 1/2" | 1"     | 1 1/2" | 1 1/2" | 1 1/2" | 1"     | 1 1/2" | 1 1/2" | 1 1/2" | 1 1/2" |
|                                 | Max          | 1 1/2" | 2 1/2" | 3"     | 2 1/2" | 3"     | 3"     | 3"     | 2 1/2" | 3"     | 3"     | 3"     | 4"     |
| NPT (P5, P6)                    | Std.         | 3/8"   | 3/8"   | 3/8"   | 1/2"   | 1/2"   | 1/2"   | 1/2"   | 3/4"   | 3/4"   | 3/4"   | 3/4"   | 3/4"   |

|                   |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Stroke Time (sec) | Min | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

Stroke time varies with supply pressure, temperature, spring rate, travel adjustment, working medium, and valve torque. Values shown with no valve resistance. Contact factory about faster stroke speed.

|                   |                  |      |      |      |      |      |      |      |      |      |      |      |      |
|-------------------|------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Center of Gravity | COG <sub>x</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
|                   | COG <sub>y</sub> | 0.76 | 2.03 | 0.51 | 2.54 | 2.54 | 0.00 | 0.00 | 0.00 | 0.00 | 2.54 | 0.00 | 0.00 |
|                   | COG <sub>z</sub> | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 2.54 | 0.00 | 0.00 |

|             |                |     |     |         |     |     |         |         |     |     |     |          |          |
|-------------|----------------|-----|-----|---------|-----|-----|---------|---------|-----|-----|-----|----------|----------|
| Weight (lb) | Stainless (FS) | 199 | 232 | S1: 458 | 318 | 415 | S1: 736 | S1: 954 | 518 | 603 | 798 | S1: 1383 | S1: 1925 |
|             |                |     |     | S2: 439 |     |     | S2: 627 | S2: 845 |     |     |     | S2: 1283 | S2: 1822 |
|             |                |     |     | S3: 405 |     |     | S3: 557 | S3: 775 |     |     |     | S3: 1212 | S3: 1612 |
|             |                |     |     | S4: 414 |     |     | ----    | ----    |     |     |     | S4: 1141 | S4: 1612 |
|             |                |     |     | S5: 362 |     |     | ----    | ----    |     |     |     | ----     | S5: 1518 |
|             |                |     |     | ----    |     |     | ----    | ----    |     |     |     | ----     | S6: 1440 |
|             | Ductile (FD)   | 173 | 202 | S1: 416 | 280 | 350 | S1: 647 | S1: 821 | 460 | 527 | 690 | S1: 1287 | S1: 1728 |
|             |                |     |     | S2: 397 |     |     | S2: 538 | S2: 712 |     |     |     | S2: 1187 | S2: 1625 |
|             |                |     |     | S3: 364 |     |     | S3: 467 | S3: 641 |     |     |     | S3: 1115 | S3: 1547 |
|             |                |     |     | S4: 373 |     |     | ----    | ----    |     |     |     | S4: 1045 | S4: 1415 |
|             |                |     |     | S5: 320 |     |     | ----    | ----    |     |     |     | ----     | S5: 1321 |
|             |                |     |     | ----    |     |     | ----    | ----    |     |     |     | ----     | S6: 1243 |

|                        |       |       |       |         |        |        |        |        |        |        |        |        |
|------------------------|-------|-------|-------|---------|--------|--------|--------|--------|--------|--------|--------|--------|
| Max Rated Torque (N-m) | 9,039 | 9,039 | 9,039 | 22,5970 | 22,597 | 22,597 | 22,597 | 56,492 | 56,492 | 56,492 | 56,492 | 56,492 |
| Max Pressure (bar)     | 8.27  | 8.27  | 8.27  | 8.27    | 8.27   | 8.27   | 8.27   | 8.27   | 8.27   | 8.27   | 8.27   | 6.89   |

| TEMPERATURE LIMITS |               |                |
|--------------------|---------------|----------------|
| Low                | Standard      | High           |
| -51°C to 85°C      | -28°C to 85°C | -28°C to 204°C |

Environmental temperature requirements may limit the use of certain trim materials. Temperature ranges may be extended with proper insulation. Ductile iron units may be used in low temperature (less than -28°C), but stroke speed should be limited to prevent brittle fracture. Extended temperature ranges available upon request.



## Pressure Equipment Directive (PED) Category Determination

The European Pressure Equipment Directive (PED, 2014/68/EU, supersedes 97/23/EC) requires equipment to be placed in categories based on Fluid Group and Bar Liter rating. Determination of Fluid Group is the responsibility of the End User. Bettis RGS F-Series actuator ratings are listed below:

| MODEL      | BAR LITER RATING | CATEGORY      |               |
|------------|------------------|---------------|---------------|
|            |                  | Fluid Group 2 | Fluid Group 1 |
| F2200SR06  | 37.21            | SEP           | 1             |
| F2200SP106 | 74.41            | 1             | 2             |
| F2200SP108 | 132.29           | 1             | 2             |
| F2250SR08  | 82.68            | 1             | 2             |
| F2250SP108 | 165.37           | 1             | 2             |
| F2250SR10  | 129.19           | 1             | 2             |
| F2250SP110 | 258.38           | 2             | 3             |
| F2251SR08  | 86.04            | 1             | 2             |
| F2251SP108 | 172.07           | 1             | 2             |
| F2300SR12  | 223.24           | 2             | 3             |
| F2300SP112 | 446.49           | 2             | 3             |
| F2375SR16  | 496.10           | 2             | 3             |
| F2375SP116 | 992.20           | 2             | 3             |
| F2488SR16  | 645.59           | 2             | 3             |
| F2488SP116 | 1291.18          | 3             | 4             |
| F2488SR20  | 1008.73          | 3             | 4             |
| F2488SP120 | 2017.47          | 3             | 4             |
| F2575SR20  | 1188.57          | 3             | 4             |
| F2575SP120 | 2377.14          | 3             | 4             |
| F2575SR24  | 1426.28          | 3             | 4             |
| F2575SP124 | 2852.57          | 3             | 4             |

| MODEL      | BAR LITER RATING | CATEGORY      |               |
|------------|------------------|---------------|---------------|
|            |                  | Fluid Group 2 | Fluid Group 1 |
| F2200DA06  | 44.03            | SEP           | 1             |
| F2200DP106 | 88.07            | 1             | 2             |
| F2250DA06  | 55.01            | 1             | 2             |
| F2250DP106 | 110.02           | 1             | 2             |
| F2250DA08  | 95.38            | 1             | 2             |
| F2250DP108 | 190.77           | 1             | 2             |
| F2300DA08  | 101.07           | 1             | 2             |
| F2300DP108 | 202.15           | 2             | 3             |
| F2300DA10  | 155.03           | 1             | 2             |
| F2300DP110 | 310.06           | 2             | 3             |
| F2300DA12  | 223.24           | 2             | 3             |
| F2300DP112 | 446.49           | 2             | 3             |
| F2375DA10  | 201.34           | 2             | 3             |
| F2375DP110 | 402.67           | 2             | 3             |
| F2375DA12  | 279.06           | 2             | 3             |
| F2375DP112 | 558.11           | 2             | 3             |
| F2488DA12  | 363.14           | 2             | 3             |
| F2488DP112 | 726.29           | 2             | 3             |
| F2488DA16  | 645.59           | 2             | 3             |
| F2488DP116 | 1291.18          | 3             | 4             |
| F2575DA12  | 427.88           | 2             | 3             |
| F2575DP112 | 855.77           | 2             | 3             |
| F2575DA16  | 760.68           | 2             | 3             |
| F2575DP116 | 1521.37          | 3             | 4             |
| F2575DA20  | 1188.57          | 3             | 4             |
| F2575DP120 | 2377.14          | 3             | 4             |

Ratings are shown at maximum operating pressure. Models that fall under SEP are below the minimum Bar Liter rating and not required to comply with the PED. Those models can still be supplied as fully PED compliant if required by customer request. The CE mark will be applied to SEP models only if PED compliance is requested or if the mark is applicable to other directives (for example, ATEX).

## Output Torque Data

The following tables show output torque for common pressures. Actuators may generate more torque than the maximum rating at higher pressures (refer to torque ratings). Actuators should not be sized above their maximum torque rating unless there is no possibility that the valve will resist with a value above that rating.

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

### Double-Acting (Imperial, in-lb)

|           | 20 PSIG |        |         | 40 PSIG |         |         | 60 PSIG |         |         |
|-----------|---------|--------|---------|---------|---------|---------|---------|---------|---------|
|           | Start   | Min.   | End     | Start   | Min.    | End     | Start   | Min.    | End     |
| F2200DA06 | 4,927   | 2,036  | 3,469   | 9,854   | 4,072   | 6,938   | 14,781  | 6,107   | 10,407  |
| F2250DA06 | 6,159   | 2,564  | 4,336   | 12,318  | 5,129   | 8,673   | 18,477  | 7,693   | 13,009  |
| F2250DA08 | 10,949  | 4,524  | 7,709   | 21,898  | 9,048   | 15,418  | 32,847  | 13,572  | 23,127  |
| F2300DA08 | 13,139  | 5,429  | 9,251   | 26,278  | 10,858  | 18,502  | 39,417  | 16,286  | 27,753  |
| F2300DA10 | 20,529  | 8,482  | 14,454  | 41,059  | 16,964  | 28,909  | 61,588  | 25,446  | 43,363  |
| F2300DA12 | 29,563  | 12,215 | 20,815  | 59,125  | 24,429  | 41,629  | 88,688  | 36,644  | 62,444  |
| F2375DA10 | 25,662  | 10,603 | 18,068  | 51,324  | 21,206  | 36,136  | 76,985  | 31,808  | 54,204  |
| F2375DA12 | 36,953  | 15,268 | 26,018  | 73,906  | 30,536  | 52,037  | 110,859 | 45,804  | 78,055  |
| F2488DA12 | 48,039  | 19,849 | 33,824  | 96,078  | 39,698  | 67,648  | 144,117 | 59,546  | 101,471 |
| F2488DA16 | 85,403  | 35,286 | 60,131  | 170,806 | 70,573  | 120,262 | 256,208 | 105,859 | 180,393 |
| F2575DA12 | 56,661  | 23,411 | 39,895  | 113,323 | 46,822  | 79,790  | 169,984 | 70,233  | 119,684 |
| F2575DA16 | 100,731 | 41,620 | 70,924  | 201,463 | 83,240  | 141,848 | 302,194 | 124,859 | 212,772 |
| F2575DA20 | 157,393 | 65,031 | 110,819 | 314,786 | 130,062 | 221,638 | 472,179 | 195,093 | 332,456 |

|           | 80 PSIG |         |         | 100 PSIG |         |         | 120 PSIG |         |         |
|-----------|---------|---------|---------|----------|---------|---------|----------|---------|---------|
|           | Start   | Min.    | End     | Start    | Min.    | End     | Start    | Min.    | End     |
| F2200DA06 | 19,708  | 8,143   | 13,876  | 24,635   | 10,179  | 17,345  | 29,562   | 12,215  | 20,814  |
| F2250DA06 | 24,636  | 10,257  | 17,345  | 30,795   | 12,821  | 21,681  | 36,954   | 15,386  | 26,018  |
| F2250DA08 | 43,796  | 18,096  | 30,836  | 54,745   | 22,620  | 38,545  | 65,694   | 27,144  | 46,254  |
| F2300DA08 | 52,556  | 21,715  | 37,004  | 65,695   | 27,144  | 46,255  | 78,834   | 32,573  | 55,506  |
| F2300DA10 | 82,117  | 33,928  | 57,817  | 102,646  | 42,410  | 72,271  | 123,176  | 50,892  | 86,726  |
| F2300DA12 | 118,250 | 48,858  | 83,258  | 147,813  | 61,073  | 104,073 | 177,375  | 73,287  | 124,887 |
| F2375DA10 | 102,647 | 42,411  | 72,272  | 128,309  | 53,014  | 90,340  | 153,971  | 63,617  | 108,408 |
| F2375DA12 | 147,812 | 61,072  | 104,073 | 184,765  | 76,340  | 130,091 | 221,718  | 91,608  | 156,110 |
| F2488DA12 | 192,156 | 79,395  | 135,295 | 240,195  | 99,244  | 169,119 | 288,234  | 119,093 | 202,943 |
| F2488DA16 | 341,611 | 141,145 | 240,524 | 427,014  | 176,431 | 300,655 | 512,417  | 211,718 | 360,786 |
| F2575DA12 | 226,645 | 93,644  | 159,579 | 283,306  | 117,055 | 199,474 | 339,968  | 140,466 | 239,369 |
| F2575DA16 | 402,925 | 166,479 | 283,696 | 503,656  | 208,099 | 354,620 | 604,388  | 249,719 | 425,544 |
| F2575DA20 | 629,572 | 260,124 | 443,275 | 786,965  | 325,155 | 554,094 | 944,358  | 390,186 | 664,913 |

## Double-Acting (Metric, N·m)

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

|           | 1.5 BAR |       |        | 3 BAR  |        |        | 4 BAR  |        |        |
|-----------|---------|-------|--------|--------|--------|--------|--------|--------|--------|
|           | Start   | Min.  | End    | Start  | Min.   | End    | Start  | Min.   | End    |
| F2200DA06 | 606     | 250   | 426    | 1,211  | 500    | 853    | 1,615  | 667    | 1,137  |
| F2250DA06 | 757     | 315   | 533    | 1,514  | 630    | 1,066  | 2,019  | 840    | 1,421  |
| F2250DA08 | 1,346   | 556   | 947    | 2,691  | 1,112  | 1,895  | 3,588  | 1,483  | 2,527  |
| F2300DA08 | 1,615   | 667   | 1,137  | 3,230  | 1,334  | 2,274  | 4,306  | 1,779  | 3,032  |
| F2300DA10 | 2,523   | 1,043 | 1,776  | 5,046  | 2,085  | 3,553  | 6,728  | 2,780  | 4,737  |
| F2300DA12 | 3,633   | 1,501 | 2,558  | 7,266  | 3,002  | 5,116  | 9,688  | 4,003  | 6,821  |
| F2375DA10 | 3,154   | 1,303 | 2,221  | 6,308  | 2,606  | 4,441  | 8,410  | 3,475  | 5,922  |
| F2375DA12 | 4,542   | 1,876 | 3,198  | 9,083  | 3,753  | 6,395  | 12,111 | 5,004  | 8,527  |
| F2488DA12 | 5,904   | 2,439 | 4,157  | 11,808 | 4,879  | 8,314  | 15,744 | 6,505  | 11,085 |
| F2488DA16 | 10,496  | 4,337 | 7,390  | 20,993 | 8,674  | 14,781 | 27,990 | 11,565 | 19,707 |
| F2575DA12 | 6,964   | 2,877 | 4,903  | 13,928 | 5,755  | 9,806  | 18,570 | 7,673  | 13,075 |
| F2575DA16 | 12,380  | 5,115 | 8,717  | 24,760 | 10,230 | 17,434 | 33,014 | 13,641 | 23,245 |
| F2575DA20 | 19,344  | 7,993 | 13,620 | 38,688 | 15,985 | 27,240 | 51,584 | 21,313 | 36,320 |

|           | 5.5 BAR |        |        | 7 BAR  |        |        | 8 BAR   |        |        |
|-----------|---------|--------|--------|--------|--------|--------|---------|--------|--------|
|           | Start   | Min.   | End    | Start  | Min.   | End    | Start   | Min.   | End    |
| F2200DA06 | 2,220   | 917    | 1,563  | 2,826  | 1,168  | 1,990  | 3,230   | 1,334  | 2,274  |
| F2250DA06 | 2,776   | 1,156  | 1,954  | 3,532  | 1,471  | 2,487  | 4,037   | 1,681  | 2,842  |
| F2250DA08 | 4,934   | 2,039  | 3,474  | 6,280  | 2,595  | 4,421  | 7,177   | 2,965  | 5,053  |
| F2300DA08 | 5,921   | 2,446  | 4,169  | 7,536  | 3,114  | 5,306  | 8,612   | 3,558  | 6,064  |
| F2300DA10 | 9,251   | 3,823  | 6,513  | 11,774 | 4,865  | 8,290  | 13,456  | 5,560  | 9,474  |
| F2300DA12 | 13,321  | 5,504  | 9,379  | 16,955 | 7,006  | 11,937 | 19,377  | 8,006  | 13,643 |
| F2375DA10 | 11,564  | 4,778  | 8,142  | 14,718 | 6,081  | 10,363 | 16,821  | 6,950  | 11,843 |
| F2375DA12 | 16,653  | 6,880  | 11,725 | 21,194 | 8,757  | 14,923 | 24,222  | 10,008 | 17,055 |
| F2488DA12 | 21,648  | 8,945  | 15,242 | 27,553 | 11,384 | 19,400 | 31,489  | 13,011 | 22,171 |
| F2488DA16 | 38,486  | 15,902 | 27,098 | 48,983 | 20,238 | 34,488 | 55,980  | 23,130 | 39,415 |
| F2575DA12 | 25,534  | 10,550 | 17,978 | 32,498 | 13,427 | 22,882 | 37,140  | 15,346 | 26,150 |
| F2575DA16 | 45,394  | 18,756 | 31,961 | 57,774 | 23,871 | 40,678 | 66,028  | 27,281 | 46,489 |
| F2575DA20 | 70,928  | 29,306 | 49,940 | 90,272 | 37,298 | 63,560 | 103,168 | 42,627 | 72,640 |

## Spring-Return (Imperial, in-lb)

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

| LEFT HAND (FAIL CLOSE) |          | SPRINGS | OPERATING PRESSURE (PSIG) |       |        |        |        |        |        |
|------------------------|----------|---------|---------------------------|-------|--------|--------|--------|--------|--------|
|                        |          |         | 20                        | 40    | 60     | 80     | 100    | 120    |        |
| F2200                  | SR06-S1  | Start   | 7,971                     | ----  | ----   | 7,533  | 12,460 | 17,387 | 22,314 |
|                        |          | Minimum | 3,940                     | ----  | ----   | 2,040  | 4,033  | 6,027  | 8,020  |
|                        |          | End     | 7,248                     | ----  | ----   | 2,436  | 5,905  | 9,374  | 12,843 |
|                        | SR06-S2  | Start   | 5,899                     | ----  | 4,867  | 9,794  | 14,721 | 19,648 | 24,575 |
|                        |          | Minimum | 2,844                     | ----  | 1,177  | 3,188  | 5,199  | 7,210  | 9,220  |
|                        |          | End     | 4,987                     | ----  | 1,039  | 4,508  | 7,977  | 11,446 | 14,915 |
|                        | SR06-S3  | Start   | 2,071                     | 2,666 | 7,594  | 12,521 | 17,448 | 22,376 | 27,303 |
|                        |          | Minimum | 1,095                     | 939   | 2,974  | 5,008  | 7,042  | 9,077  | 11,111 |
|                        |          | End     | 2,261                     | 1,398 | 4,867  | 8,336  | 11,805 | 15,274 | 18,743 |
| F2250                  | SR08-S11 | Start   | 19,046                    | ----  | ----   | 14,076 | 25,025 | 35,974 | 46,923 |
|                        |          | Minimum | 9,689                     | ----  | ----   | 3,598  | 8,027  | 12,456 | 16,885 |
|                        |          | End     | 18,771                    | ----  | ----   | 4,082  | 11,791 | 19,501 | 27,210 |
|                        | SR08-S1  | Start   | 16,000                    | ----  | ----   | 17,086 | 28,035 | 38,984 | 49,933 |
|                        |          | Minimum | 8,138                     | ----  | ----   | 5,281  | 9,754  | 14,227 | 18,700 |
|                        |          | End     | 15,761                    | ----  | ----   | 7,127  | 14,836 | 22,545 | 30,254 |
|                        | SR08-S21 | Start   | 11,430                    | ----  | 10,537 | 21,486 | 32,435 | 43,385 | 54,334 |
|                        |          | Minimum | 5,833                     | ----  | 3,168  | 7,668  | 12,168 | 16,669 | 21,169 |
|                        |          | End     | 11,362                    | ----  | 3,989  | 11,698 | 19,407 | 27,117 | 34,826 |
|                        | SR08-S2  | Start   | 11,085                    | ----  | 11,023 | 21,972 | 32,921 | 43,870 | 54,819 |
|                        |          | Minimum | 5,630                     | ----  | 3,371  | 7,871  | 12,371 | 16,872 | 21,372 |
|                        |          | End     | 10,875                    | ----  | 4,333  | 12,042 | 19,751 | 27,460 | 35,169 |
|                        | SR08-S31 | Start   | 7,616                     | 3,539 | 14,489 | 25,438 | 36,387 | 47,337 | 58,286 |
|                        |          | Minimum | 3,856                     | 657   | 5,171  | 9,684  | 14,197 | 18,711 | 23,224 |
|                        |          | End     | 7,410                     | 93    | 7,802  | 15,511 | 23,220 | 30,929 | 38,638 |
|                        | SR08-S3  | Start   | 4,915                     | 6,063 | 17,012 | 27,961 | 38,910 | 49,859 | 60,808 |
|                        |          | Minimum | 2,509                     | 2,009 | 6,527  | 11,045 | 15,563 | 20,081 | 24,599 |
|                        |          | End     | 4,886                     | 2,794 | 10,503 | 18,212 | 25,921 | 33,630 | 41,339 |
|                        | SR10-S1  | Start   | 23,363                    | ----  | 11,136 | 28,244 | 45,352 | 62,460 | 79,568 |
|                        |          | Minimum | 11,896                    | ----  | 2,108  | 9,110  | 16,112 | 23,114 | 30,116 |
|                        |          | End     | 23,080                    | ----  | 728    | 12,773 | 24,818 | 36,864 | 48,909 |
|                        | SR10-S2  | Start   | 16,000                    | ----  | 18,455 | 35,563 | 52,671 | 69,779 | 86,887 |
|                        |          | Minimum | 8,138                     | ----  | 5,941  | 12,980 | 20,019 | 27,059 | 34,098 |
|                        |          | End     | 15,761                    | ----  | 8,091  | 20,136 | 32,181 | 44,227 | 56,272 |
|                        | SR10-S3  | Start   | 11,085                    | ----  | 23,341 | 40,449 | 57,557 | 74,665 | 91,773 |
|                        |          | Minimum | 5,630                     | ----  | 8,478  | 15,532 | 22,586 | 29,640 | 36,694 |
|                        |          | End     | 10,875                    | ----  | 13,006 | 25,052 | 37,098 | 49,143 | 61,189 |

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

| LEFT HAND (FAIL CLOSE) |         | SPRINGS | OPERATING PRESSURE (PSIG) |        |        |         |         |         |         |
|------------------------|---------|---------|---------------------------|--------|--------|---------|---------|---------|---------|
|                        |         |         | 20                        | 40     | 60     | 80      | 100     | 120     |         |
| F2300                  | SR12-S1 | Start   | 46,325                    | ----   | ----   | 46,062  | 75,624  | 105,187 | 134,749 |
|                        |         | Minimum | 22,991                    | ----   | ----   | 12,974  | 24,962  | 36,951  | 48,939  |
|                        |         | End     | 42,625                    | ----   | ----   | 16,119  | 36,934  | 57,748  | 78,563  |
|                        | SR12-S2 | Start   | 37,246                    | ----   | ----   | 54,416  | 83,979  | 113,541 | 143,104 |
|                        |         | Minimum | 18,486                    | ----   | ----   | 17,770  | 29,855  | 41,941  | 54,026  |
|                        |         | End     | 34,272                    | ----   | ----   | 25,198  | 46,013  | 66,827  | 87,642  |
|                        | SR12-S3 | Start   | 29,503                    | ----   | 31,978 | 61,540  | 91,102  | 120,665 | 150,227 |
|                        |         | Minimum | 14,643                    | ----   | 9,620  | 21,752  | 33,884  | 46,015  | 58,147  |
|                        |         | End     | 27,147                    | ----   | 12,126 | 32,941  | 53,756  | 74,570  | 95,385  |
|                        | SR12-S4 | Start   | 25,900                    | ----   | 35,293 | 64,856  | 94,419  | 123,981 | 153,544 |
|                        |         | Minimum | 12,855                    | ----   | 11,452 | 23,605  | 35,758  | 47,912  | 60,065  |
|                        |         | End     | 23,832                    | ----   | 15,729 | 36,544  | 57,359  | 78,173  | 98,988  |
| F2375                  | SR16-S1 | Start   | 81,397                    | ----   | ----   | 110,341 | 176,035 | 241,730 | 307,424 |
|                        |         | Minimum | 42,648                    | ----   | ----   | 38,370  | 65,376  | 92,382  | 119,388 |
|                        |         | End     | 86,742                    | ----   | ----   | 57,367  | 103,622 | 149,876 | 196,131 |
|                        | SR16-S2 | Start   | 63,151                    | ----   | 64,091 | 129,785 | 195,479 | 261,174 | 326,868 |
|                        |         | Minimum | 33,088                    | ----   | 21,079 | 48,162  | 75,245  | 102,329 | 129,412 |
|                        |         | End     | 67,298                    | ----   | 29,358 | 75,613  | 121,868 | 168,122 | 214,377 |
|                        | SR16-S3 | Start   | 52,628                    | ----   | 75,305 | 140,999 | 206,693 | 272,388 | 338,082 |
|                        |         | Minimum | 27,575                    | ----   | 26,630 | 53,733  | 80,836  | 107,938 | 135,041 |
|                        |         | End     | 56,084                    | ----   | 39,881 | 86,136  | 132,391 | 178,645 | 224,900 |
|                        | SR16-S4 | Start   | 47,014                    | ----   | 81,287 | 146,982 | 212,677 | 278,371 | 344,066 |
|                        |         | Minimum | 24,633                    | ----   | 29,580 | 56,687  | 83,794  | 110,900 | 138,007 |
|                        |         | End     | 50,102                    | ----   | 45,495 | 91,750  | 138,005 | 184,259 | 230,514 |
|                        | SR16-S5 | Start   | 34,383                    | 29,054 | 94,749 | 160,443 | 226,137 | 291,832 | 357,526 |
|                        |         | Minimum | 18,015                    | 9,102  | 36,218 | 63,335  | 90,452  | 117,568 | 144,685 |
|                        |         | End     | 36,640                    | 11,872 | 58,126 | 104,381 | 150,636 | 196,890 | 243,145 |

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

| LEFT HAND (FAIL CLOSE) |         | SPRINGS | OPERATING PRESSURE (PSIG) |        |         |         |         |         |         |
|------------------------|---------|---------|---------------------------|--------|---------|---------|---------|---------|---------|
|                        |         |         | 20                        | 40     | 60      | 80      | 100     | 120     |         |
| F2488                  | SR16-S1 | Start   | 176,794                   | ----   | ----    | ----    | 165,880 | 251,282 | 336,685 |
|                        |         | Minimum | 90,225                    | ----   | ----    | ----    | 49,598  | 84,554  | 119,510 |
|                        |         | End     | 175,731                   | ----   | ----    | ----    | 63,730  | 123,862 | 183,993 |
|                        | SR16-S2 | Start   | 101,571                   | ----   | 67,292  | 152,695 | 238,098 | 323,500 | 408,903 |
|                        |         | Minimum | 52,321                    | ----   | 18,106  | 53,320  | 88,533  | 123,747 | 158,960 |
|                        |         | End     | 103,514                   | ----   | 18,691  | 78,822  | 138,953 | 199,085 | 259,216 |
|                        | SR16-S3 | Start   | 75,223                    | ----   | 98,588  | 183,991 | 269,394 | 354,796 | 440,199 |
|                        |         | Minimum | 37,904                    | ----   | 32,523  | 67,736  | 102,949 | 138,163 | 173,376 |
|                        |         | End     | 72,218                    | ----   | 45,039  | 105,170 | 165,301 | 225,433 | 285,564 |
|                        | SR20-S1 | Start   | 176,794                   | ----   | ----    | 224,594 | 358,036 | 491,478 | 624,920 |
|                        |         | Minimum | 90,225                    | ----   | ----    | 74,644  | 129,600 | 184,556 | 239,512 |
|                        |         | End     | 175,731                   | ----   | ----    | 105,071 | 199,026 | 292,980 | 386,935 |
|                        | SR20-S2 | Start   | 101,571                   | ----   | 163,370 | 296,812 | 430,254 | 563,696 | 697,138 |
|                        |         | Minimum | 52,321                    | ----   | 57,803  | 112,866 | 167,928 | 222,990 | 278,052 |
|                        |         | End     | 103,514                   | ----   | 86,339  | 180,294 | 274,249 | 368,203 | 462,158 |
|                        | SR20-S3 | Start   | 75,223                    | 61,224 | 194,666 | 328,107 | 461,549 | 594,991 | 728,433 |
|                        |         | Minimum | 37,904                    | 17,158 | 72,220  | 127,282 | 182,344 | 237,406 | 292,468 |
|                        |         | End     | 72,218                    | 18,732 | 112,686 | 206,641 | 300,596 | 394,550 | 488,505 |

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

| LEFT HAND (FAIL CLOSE) |         | SPRINGS | OPERATING PRESSURE (PSIG) |         |         |         |         |           |           |
|------------------------|---------|---------|---------------------------|---------|---------|---------|---------|-----------|-----------|
|                        |         |         | 20                        | 40      | 60      | 80      | 100     | 120       |           |
| F2575                  | SR20-S1 | Start   | 356,035                   | ----    | ----    | ----    | 298,448 | 455,840   | 613,233   |
|                        |         | Minimum | 177,338                   | ----    | ----    | ----    | 78,588  | 142,570   | 206,551   |
|                        |         | End     | 331,124                   | ----    | ----    | ----    | 87,239  | 198,057   | 308,876   |
|                        | SR20-S2 | Start   | 270,815                   | ----    | ----    | 216,551 | 373,944 | 531,336   | 688,729   |
|                        |         | Minimum | 135,621                   | ----    | ----    | 57,873  | 122,371 | 186,869   | 251,367   |
|                        |         | End     | 255,628                   | ----    | ----    | 61,640  | 172,459 | 283,277   | 394,096   |
|                        | SR20-S3 | Start   | 246,715                   | ----    | ----    | 246,007 | 403,400 | 560,792   | 718,185   |
|                        |         | Minimum | 122,249                   | ----    | ----    | 71,330  | 135,857 | 200,383   | 264,910   |
|                        |         | End     | 226,172                   | ----    | ----    | 85,740  | 196,559 | 307,377   | 418,196   |
|                        | SR20-S4 | Start   | 194,540                   | ----    | ----    | 291,730 | 449,123 | 606,517   | 763,910   |
|                        |         | Minimum | 96,805                    | ----    | ----    | 97,300  | 162,001 | 226,703   | 291,404   |
|                        |         | End     | 180,449                   | ----    | ----    | 137,916 | 248,735 | 359,553   | 470,372   |
|                        | SR24-S1 | Start   | 523,709                   | ----    | ----    | ----    | 405,081 | 631,727   | 858,373   |
|                        |         | Minimum | 263,649                   | ----    | ----    | ----    | 105,204 | 197,418   | 289,631   |
|                        |         | End     | 501,502                   | ----    | ----    | ----    | 114,606 | 274,184   | 433,763   |
|                        | SR24-S2 | Start   | 438,489                   | ----    | ----    | ----    | 480,578 | 707,224   | 933,870   |
|                        |         | Minimum | 221,908                   | ----    | ----    | ----    | 149,216 | 241,996   | 334,777   |
|                        |         | End     | 426,005                   | ----    | ----    | ----    | 199,826 | 359,404   | 518,983   |
|                        | SR24-S3 | Start   | 414,389                   | ----    | ----    | ----    | 510,034 | 736,680   | 963,326   |
|                        |         | Minimum | 208,564                   | ----    | ----    | ----    | 162,760 | 255,590   | 348,421   |
|                        |         | End     | 396,550                   | ----    | ----    | ----    | 223,926 | 383,504   | 543,083   |
|                        | SR24-S4 | Start   | 356,035                   | ----    | ----    | 348,813 | 575,459 | 802,105   | 1,028,751 |
|                        |         | Minimum | 177,338                   | ----    | ----    | 101,525 | 194,480 | 287,434   | 380,389   |
|                        |         | End     | 331,124                   | ----    | ----    | 122,701 | 282,280 | 441,858   | 601,437   |
| SR24-S5                | Start   | 270,815 | ----                      | ----    | 424,309 | 650,955 | 877,601 | 1,104,247 |           |
|                        | Minimum | 135,621 | ----                      | ----    | 144,063 | 237,291 | 330,519 | 423,747   |           |
|                        | End     | 255,628 | ----                      | ----    | 207,921 | 367,500 | 527,078 | 686,657   |           |
| SR24-S6                | Start   | 246,715 | ----                      | 227,120 | 453,765 | 680,411 | 907,057 | 1,133,703 |           |
|                        | Minimum | 122,249 | ----                      | 64,222  | 157,457 | 250,692 | 343,928 | 437,163   |           |
|                        | End     | 226,172 | ----                      | 72,442  | 232,021 | 391,600 | 551,178 | 710,757   |           |



## Spring-Return (Metric, N·m)

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

| LEFT HAND (FAIL CLOSE) |          | SPRINGS | OPERATING PRESSURE (BAR) |      |       |       |       |       |       |
|------------------------|----------|---------|--------------------------|------|-------|-------|-------|-------|-------|
|                        |          |         | 1.5                      | 3    | 4     | 5.5   | 7     | 8     |       |
| F2200                  | SR06-S1  | Start   | 901                      | ---- | ----  | 796   | 1,401 | 2,007 | 2,411 |
|                        |          | Minimum | 445                      | ---- | ----  | 208   | 453   | 698   | 861   |
|                        |          | End     | 819                      | ---- | ----  | 236   | 663   | 1,089 | 1,373 |
|                        | SR06-S2  | Start   | 667                      | ---- | 648   | 1,051 | 1,657 | 2,262 | 2,666 |
|                        |          | Minimum | 321                      | ---- | 173   | 338   | 585   | 832   | 997   |
|                        |          | End     | 563                      |      | 186   | 470   | 897   | 1,323 | 1,607 |
|                        | SR06-S3  | Start   | 234                      | 350  | 956   | 1,359 | 1,965 | 2,571 | 2,974 |
|                        |          | Minimum | 124                      | 126  | 376   | 543   | 793   | 1,043 | 1,210 |
|                        |          | End     | 255                      | 192  | 619   | 903   | 1,329 | 1,756 | 2,040 |
| F2250                  | SR08-S11 | Start   | 2,152                    | ---- | ----  | 1,468 | 2,813 | 4,159 | 5,056 |
|                        |          | Minimum | 1,095                    | ---- | ----  | 357   | 901   | 1,446 | 1,808 |
|                        |          | End     | 2,121                    | ---- | ----  | 375   | 1,322 | 2,270 | 2,901 |
|                        | SR08-S1  | Start   | 1,808                    | ---- | ----  | 1,808 | 3,153 | 4,499 | 5,396 |
|                        |          | Minimum | 919                      | ---- | ----  | 547   | 1,096 | 1,646 | 2,013 |
|                        |          | End     | 1,781                    | ---- | ----  | 719   | 1,666 | 2,614 | 3,245 |
|                        | SR08-S21 | Start   | 1,291                    | ---- | 1,408 | 2,305 | 3,651 | 4,996 | 5,893 |
|                        |          | Minimum | 659                      | ---- | 447   | 816   | 1,369 | 1,922 | 2,291 |
|                        |          | End     | 1,284                    | ---- | 604   | 1,235 | 2,183 | 3,130 | 3,762 |
|                        | SR08-S2  | Start   | 1,252                    | ---- | 1,463 | 2,360 | 3,705 | 5,051 | 5,948 |
|                        |          | Minimum | 636                      | ---- | 470   | 839   | 1,392 | 1,945 | 2,314 |
|                        |          | End     | 1,229                    | ---- | 642   | 1,274 | 2,222 | 3,169 | 3,801 |
|                        | SR08-S31 | Start   | 860                      | 508  | 1,854 | 2,751 | 4,097 | 5,443 | 6,340 |
|                        |          | Minimum | 436                      | 119  | 674   | 1,044 | 1,598 | 2,153 | 2,523 |
|                        |          | End     | 837                      | 87   | 1,034 | 1,666 | 2,614 | 3,561 | 4,193 |
|                        | SR08-S3  | Start   | 555                      | 794  | 2,139 | 3,036 | 4,382 | 5,728 | 6,625 |
|                        |          | Minimum | 283                      | 272  | 827   | 1,197 | 1,753 | 2,308 | 2,678 |
|                        |          | End     | 552                      | 392  | 1,340 | 1,971 | 2,919 | 3,866 | 4,498 |
|                        | SR10-S1  | Start   | 2,640                    | ---- | 1,598 | 2,999 | 5,102 | 7,205 | 8,606 |
|                        |          | Minimum | 1,344                    | ---- | 377   | 951   | 1,811 | 2,672 | 3,246 |
|                        |          | End     | 2,608                    | ---- | 321   | 1,308 | 2,789 | 4,269 | 5,256 |
|                        | SR10-S2  | Start   | 1,808                    | ---- | 2,425 | 3,826 | 5,929 | 8,032 | 9,433 |
|                        |          | Minimum | 919                      | ---- | 811   | 1,388 | 2,253 | 3,118 | 3,695 |
|                        |          | End     | 1,781                    | ---- | 1,153 | 2,140 | 3,620 | 5,101 | 6,088 |
|                        | SR10-S3  | Start   | 1,252                    | ---- | 2,977 | 4,378 | 6,481 | 8,584 | 9,985 |
|                        |          | Minimum | 636                      | ---- | 1,098 | 1,676 | 2,543 | 3,410 | 3,988 |
|                        |          | End     | 1,229                    | ---- | 1,708 | 2,695 | 4,176 | 5,656 | 6,643 |

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

| LEFT HAND (FAIL CLOSE) |         | SPRINGS | OPERATING PRESSURE (BAR) |       |        |        |        |        |        |
|------------------------|---------|---------|--------------------------|-------|--------|--------|--------|--------|--------|
|                        |         |         | 1.5                      | 3     | 4      | 5.5    | 7      | 8      |        |
| F2300                  | SR12-S1 | Start   | 5,234                    | ----  | ----   | 4,873  | 8,506  | 12,139 | 14,562 |
|                        |         | Minimum | 2,598                    | ----  | ----   | 1,331  | 2,805  | 4,278  | 5,261  |
|                        |         | End     | 4,816                    | ----  | ----   | 1,588  | 4,146  | 6,704  | 8,410  |
|                        | SR12-S2 | Start   | 4,208                    | ----  | ----   | 5,817  | 9,450  | 13,083 | 15,506 |
|                        |         | Minimum | 2,089                    | ----  | ----   | 1,872  | 3,358  | 4,843  | 5,833  |
|                        |         | End     | 3,872                    | ----  | ----   | 2,614  | 5,172  | 7,730  | 9,435  |
|                        | SR12-S3 | Start   | 3,333                    | ----  | 4,199  | 6,622  | 10,255 | 13,888 | 16,310 |
|                        |         | Minimum | 1,654                    | ----  | 1,328  | 2,322  | 3,813  | 5,304  | 6,298  |
|                        |         | End     | 3,067                    | ----  | 1,783  | 3,488  | 6,047  | 8,605  | 10,310 |
|                        | SR12-S4 | Start   | 2,926                    | ----  | 4,574  | 6,996  | 10,630 | 14,263 | 16,685 |
|                        |         | Minimum | 1,452                    | ----  | 1,535  | 2,531  | 4,024  | 5,518  | 6,514  |
|                        |         | End     | 2,693                    | ----  | 2,190  | 3,896  | 6,454  | 9,012  | 10,717 |
| F2375                  | SR16-S1 | Start   | 9,197                    | ----  | ----   | 11,730 | 19,804 | 27,878 | 33,261 |
|                        |         | Minimum | 4,819                    | ----  | ----   | 4,032  | 7,352  | 10,671 | 12,883 |
|                        |         | End     | 9,801                    | ----  | ----   | 5,963  | 11,648 | 17,333 | 21,123 |
|                        | SR16-S2 | Start   | 7,135                    | ----  | 8,544  | 13,927 | 22,001 | 30,075 | 35,458 |
|                        |         | Minimum | 3,738                    | ----  | 2,919  | 5,138  | 8,467  | 11,795 | 14,014 |
|                        |         | End     | 7,604                    | ----  | 4,235  | 8,025  | 13,709 | 19,394 | 23,184 |
|                        | SR16-S3 | Start   | 5,946                    | ----  | 9,811  | 15,194 | 23,268 | 31,342 | 36,725 |
|                        |         | Minimum | 3,116                    | ----  | 3,546  | 5,767  | 9,098  | 12,429 | 14,650 |
|                        |         | End     | 6,337                    | ----  | 5,424  | 9,213  | 14,898 | 20,583 | 24,373 |
|                        | SR16-S4 | Start   | 5,312                    | ----  | 10,487 | 15,870 | 23,944 | 32,018 | 37,401 |
|                        |         | Minimum | 2,783                    | ----  | 3,880  | 6,101  | 9,432  | 12,764 | 14,985 |
|                        |         | End     | 5,661                    | ----  | 6,058  | 9,848  | 15,533 | 21,217 | 25,007 |
|                        | SR16-S5 | Start   | 3,885                    | 3,934 | 12,008 | 17,391 | 25,465 | 33,539 | 38,922 |
|                        |         | Minimum | 2,035                    | 1,297 | 4,630  | 6,852  | 10,185 | 13,517 | 15,739 |
|                        |         | End     | 4,140                    | 1,800 | 7,485  | 11,275 | 16,960 | 22,645 | 26,435 |

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.


| LEFT HAND (FAIL CLOSE) |         | SPRINGS | OPERATING PRESSURE (BAR) |       |        |        |        |        |        |
|------------------------|---------|---------|--------------------------|-------|--------|--------|--------|--------|--------|
|                        |         |         | 1.5                      | 3     | 4      | 5.5    | 7      | 8      |        |
| F2488                  | SR16-S1 | Start   | 19,975                   | ----  | ----   | ----   | 18,631 | 29,128 | 36,125 |
|                        |         | Minimum | 10,194                   | ----  | ----   | ----   | 5,559  | 9,855  | 12,719 |
|                        |         | End     | 19,855                   | ----  | ----   | ----   | 7,123  | 14,513 | 19,440 |
|                        | SR16-S2 | Start   | 11,476                   | ----  | ----   | 16,295 | 26,791 | 37,287 | 44,285 |
|                        |         | Minimum | 5,912                    | ----  | ----   | 5,629  | 9,957  | 14,285 | 17,170 |
|                        |         | End     | 11,696                   | ----  | ----   | 8,232  | 15,622 | 23,012 | 27,939 |
|                        | SR16-S3 | Start   | 8,499                    | ----  | 12,833 | 19,831 | 30,327 | 40,823 | 47,821 |
|                        |         | Minimum | 4,283                    | ----  | 4,373  | 7,258  | 11,586 | 15,914 | 18,799 |
|                        |         | End     | 8,160                    | ----  | 6,282  | 11,208 | 18,599 | 25,989 | 30,916 |
|                        | SR20-S1 | Start   | 19,975                   | ----  | ----   | 23,880 | 40,280 | 56,681 | 67,614 |
|                        |         | Minimum | 10,194                   | ----  | ----   | 7,817  | 14,572 | 21,326 | 25,829 |
|                        |         | End     | 19,855                   | ----  | ----   | 10,818 | 22,365 | 33,913 | 41,611 |
|                        | SR20-S2 | Start   | 11,476                   | ----  | 21,105 | 32,039 | 48,440 | 64,840 | 75,774 |
|                        |         | Minimum | 5,912                    | ----  | 7,623  | 12,135 | 18,902 | 25,669 | 30,181 |
|                        |         | End     | 11,696                   | ----  | 11,619 | 19,317 | 30,864 | 42,412 | 50,110 |
|                        | SR20-S3 | Start   | 8,499                    | 8,241 | 24,641 | 35,575 | 51,976 | 68,376 | 79,310 |
|                        |         | Minimum | 4,283                    | 2,485 | 9,252  | 13,764 | 20,531 | 27,298 | 31,810 |
|                        |         | End     | 8,160                    | 3,048 | 14,596 | 22,294 | 33,841 | 45,389 | 53,087 |

The torque values below indicate the actual actuator output torque. Some values may exceed the maximum rating of the actuator.

| LEFT HAND (FAIL CLOSE) |         | SPRINGS | OPERATING PRESSURE (BAR) |        |        |        |         |         |         |
|------------------------|---------|---------|--------------------------|--------|--------|--------|---------|---------|---------|
|                        |         |         | 1.5                      | 3      | 4      | 5.5    | 7       | 8       |         |
| F2575                  | SR20-S1 | Start   | 40,227                   | ----   | ----   | ----   | 33,516  | 52,861  | 65,757  |
|                        |         | Minimum | 20,037                   | ----   | ----   | ----   | 8,796   | 16,660  | 21,902  |
|                        |         | End     | 37,412                   | ----   | ----   | ----   | 9,713   | 23,333  | 32,413  |
|                        | SR20-S2 | Start   | 30,598                   | ----   | ----   | 22,702 | 42,046  | 61,390  | 74,287  |
|                        |         | Minimum | 15,323                   | ----   | ----   | 5,816  | 13,743  | 21,670  | 26,954  |
|                        |         | End     | 28,882                   | ----   | ----   | 5,722  | 19,342  | 32,962  | 42,042  |
|                        | SR20-S3 | Start   | 27,875                   | ----   | ----   | 26,030 | 45,374  | 64,719  | 77,615  |
|                        |         | Minimum | 13,812                   | ----   | ----   | 7,336  | 15,266  | 23,197  | 28,484  |
|                        |         | End     | 25,554                   | ----   | ----   | 8,445  | 22,065  | 35,685  | 44,765  |
|                        | SR20-S4 | Start   | 21,980                   | ----   | ----   | 31,196 | 50,541  | 69,885  | 82,781  |
|                        |         | Minimum | 10,938                   | ----   | ----   | 10,268 | 18,220  | 26,172  | 31,473  |
|                        |         | End     | 20,388                   | ----   | ----   | 14,340 | 27,960  | 41,580  | 50,660  |
|                        | SR24-S1 | Start   | 59,171                   | ----   | ----   | ----   | 45,475  | 73,330  | 91,901  |
|                        |         | Minimum | 29,788                   | ----   | ----   | ----   | 11,767  | 23,100  | 30,656  |
|                        |         | End     | 56,662                   | ----   | ----   | ----   | 12,742  | 32,355  | 45,430  |
|                        | SR24-S2 | Start   | 49,543                   | ----   | ----   | ----   | 54,005  | 81,860  | 100,431 |
|                        |         | Minimum | 25,072                   | ----   | ----   | ----   | 16,739  | 28,142  | 35,744  |
|                        |         | End     | 48,132                   | ----   | ----   | ----   | 22,371  | 41,984  | 55,059  |
|                        | SR24-S3 | Start   | 46,820                   | ----   | ----   | ----   | 57,333  | 85,188  | 103,759 |
|                        |         | Minimum | 23,565                   | ----   | ----   | ----   | 18,269  | 29,678  | 37,285  |
|                        |         | End     | 44,804                   | ----   | ----   | ----   | 25,094  | 44,706  | 57,782  |
|                        | SR24-S4 | Start   | 40,227                   | ----   | ----   | 36,869 | 64,725  | 92,581  | 111,151 |
|                        |         | Minimum | 20,037                   | ----   | ----   | 10,429 | 21,853  | 33,277  | 40,894  |
|                        |         | End     | 37,412                   | ----   | ----   | 12,074 | 31,687  | 51,300  | 64,375  |
| SR24-S5                | Start   | 30,598  | ----                     | ----   | 45,399 | 73,255 | 101,110 | 119,681 |         |
|                        | Minimum | 15,323  | ----                     | ----   | 15,232 | 26,690 | 38,148  | 45,786  |         |
|                        | End     | 28,882  | ----                     | ----   | 21,703 | 41,315 | 60,928  | 74,003  |         |
| SR24-S6                | Start   | 27,875  | ----                     | 30,157 | 48,727 | 76,583 | 104,439 | 123,009 |         |
|                        | Minimum | 13,812  | ----                     | 9,106  | 16,745 | 28,204 | 39,663  | 47,302  |         |
|                        | End     | 25,554  | ----                     | 11,350 | 24,426 | 44,038 | 63,651  | 76,726  |         |

## Parts Diagram and Materials of Construction

### Double-Acting

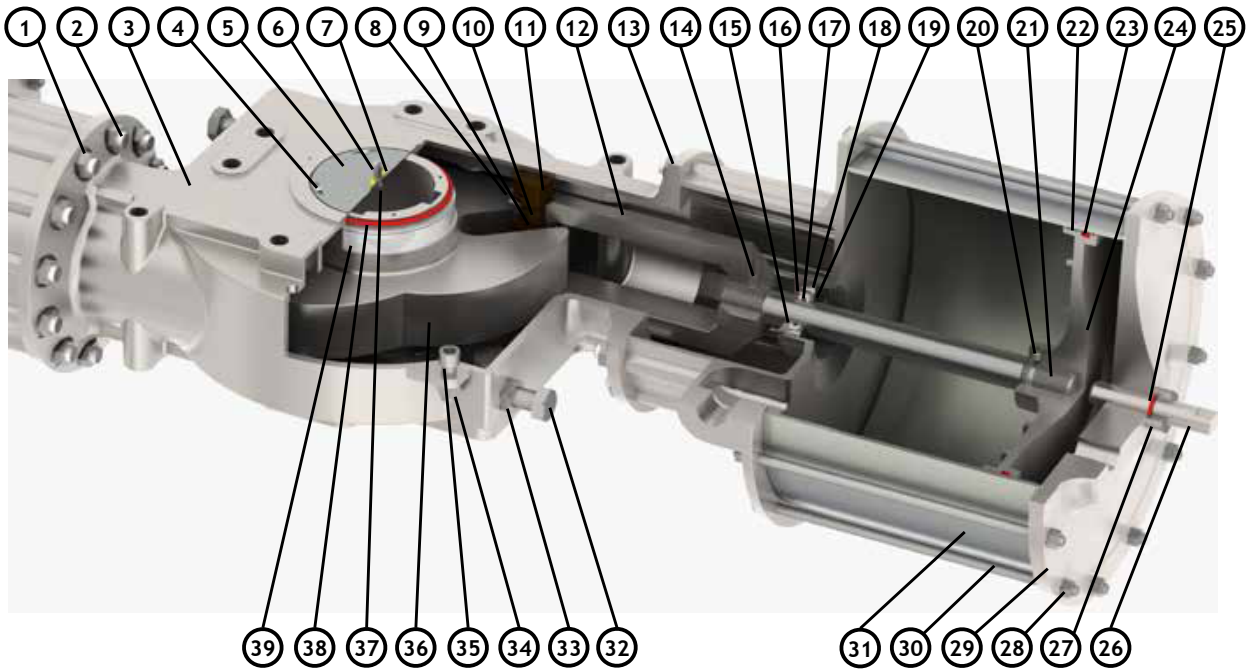


| ITEM NUMBER | PART DESCRIPTION       | MATERIAL (FS)        | MATERIAL (FD)              |
|-------------|------------------------|----------------------|----------------------------|
| 1           | Stud Hex Nut           | 304 SST              | 304 SST                    |
| 2           | Stud                   | 304 SST              | 304 SST                    |
| 3           | Body                   | CF8 SST              | Ductile Iron <sup>2</sup>  |
| 4           | Top Hat Base Bolt      | 304 SST              | 304 SST                    |
| 5           | Top Hat Base           | 304 SST              | 304 SST                    |
| 6           | Top Hat                | 316 SST PM           | 316 SST PM                 |
| 7           | Top Hat Indicator      | Nylon 6/6 GF30       | Nylon 6/6 GF30             |
| 8           | Clevis Pin Set Screw   | 304 SST              | 304 SST                    |
| 9           | Yoke Roller            | 304 SST NIT          | 304 SST NIT                |
| 10          | Clevis Pin             | 304 SST NIT          | 304 SST NIT                |
| 11          | Body Roller            | 304 SST NIT          | 304 SST NIT                |
| 12          | Clevis                 | CF8 SST              | Ductile Iron <sup>2</sup>  |
| 13          | Base Plate             | CF8 SST              | Ductile Iron <sup>2</sup>  |
| 14          | Clevis Set Screw       | 304 SST              | 304 SST                    |
| 15          | Seal Carrier           | Option <sup>1</sup>  | Option <sup>1</sup>        |
| 16          | Carrier Float Seal     | Option <sup>1</sup>  | Option <sup>1</sup>        |
| 17          | Carrier Rod Seal       | Option <sup>1</sup>  | Option <sup>1</sup>        |
| 18          | Carrier Retainer       | 304 SST              | 304 SST                    |
| 19          | Carrier Retainer Screw | 304 SST              | 304 SST                    |
| 20          | Piston Set Screw       | 304 SST              | 304 SST                    |
| 21          | Piston Bolt            | 304 SST              | 304 SST                    |
| 22          | Wiper Ring             | Option <sup>1</sup>  | Option <sup>1</sup>        |
| 23          | Piston Seal            | Option <sup>1</sup>  | Option <sup>1</sup>        |
| 24          | Piston                 | CF8 SST              | Ductile Iron <sup>2</sup>  |
| 25          | Travel Stop Seal       | Option <sup>1</sup>  | Option <sup>1</sup>        |
| 26          | End Cap Travel Stop    | 304 SST              | 304 SST                    |
| 27          | Travel Stop Nut        | 304 SST              | 304 SST                    |
| 28          | Tie Rod Hex Nut        | 304 SST              | 304 SST                    |
| 29          | End Cap                | CF8 SST              | Ductile Iron <sup>2</sup>  |
| 30          | Tie Rod                | 304 SST              | 304 SST                    |
| 31          | Cylinder               | 304 SST <sup>1</sup> | Black Amalgon <sup>1</sup> |
| 32          | Body Travel Stop       | 304 SST              | 304 SST                    |
| 33          | Body Travel Stop Nut   | 304 SST              | 304 SST                    |
| 34          | Body Fastening Nut     | 304 SST              | 304 SST                    |
| 35          | Body Fastening Bolt    | 304 SST              | 304 SST                    |
| 36          | Yoke                   | CF8 SST              | Ductile Iron <sup>2</sup>  |
| 37          | Top Hat Bolt           | 304 SST              | Ductile Iron <sup>2</sup>  |
| 38          | Yoke Seal              | Option <sup>1</sup>  | Option <sup>1</sup>        |
| 39          | Yoke Bushing           | Option <sup>1</sup>  | Option <sup>1</sup>        |

1. "Option" materials depend on trim code, see engineering string.

2. Ductile iron components are coated or plated for corrosion resistance.

304 or CF8 stainless steel may be upgraded to 316 or CF8M stainless steel based on availability or customer request. Materials shown are standard. Other materials available, contact Bettis for special options. Special coatings, plating, or surface treatments are also available.

## Spring-Return

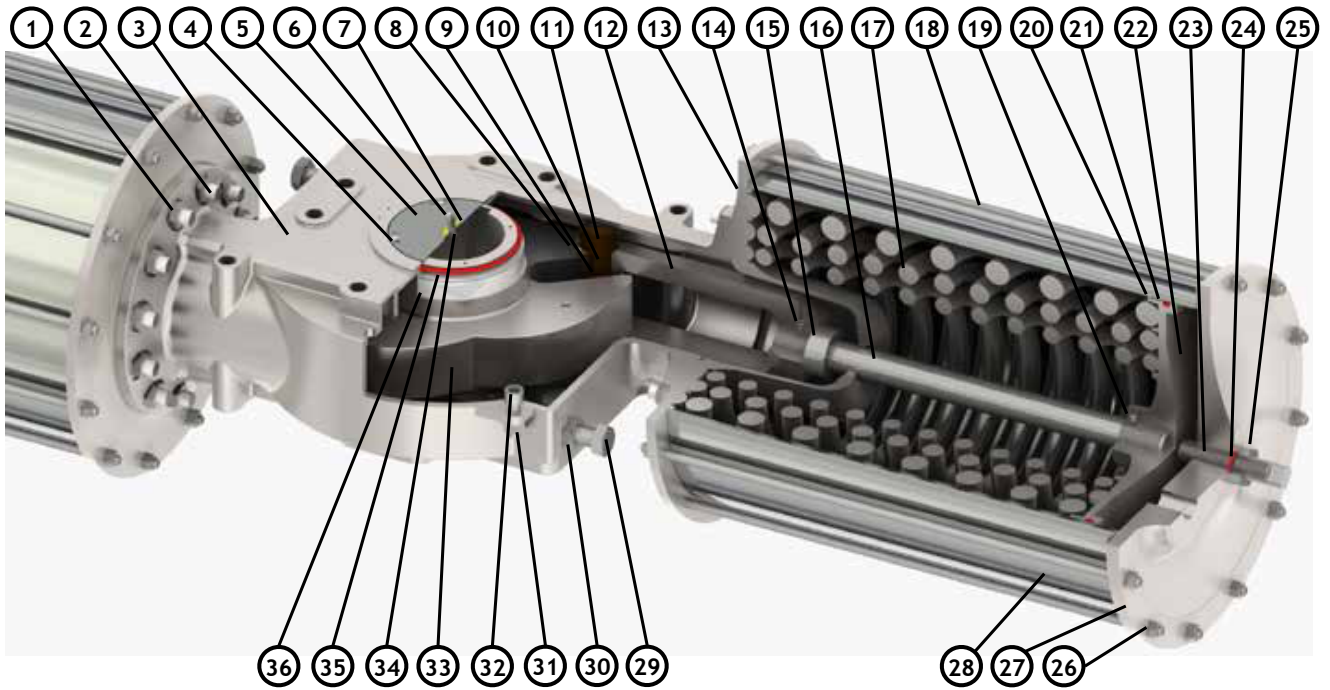

| ITEM NUMBER | PART DESCRIPTION        | MATERIAL (FS)               | MATERIAL (FD)               |
|-------------|-------------------------|-----------------------------|-----------------------------|
| 1           | Stud Hex Nut            | 304 SST                     | 304 SST                     |
| 2           | Stud                    | 304 SST                     | 304 SST                     |
| 3           | Body                    | CF8 SST                     | Ductile Iron <sup>3</sup>   |
| 4           | Top Hat Base Bolt       | 304 SST                     | 304 SST                     |
| 5           | Top Hat Base            | 304 SST                     | 304 SST                     |
| 6           | Top Hat                 | 316 SST PM                  | 316 SST PM                  |
| 7           | Top Hat Indicator       | Nylon 6/6 GF30              | Nylon 6/6 GF30              |
| 8           | Clevis Pin Set Screw    | 304 SST                     | 304 SST                     |
| 9           | Yoke Roller             | 304 SST NIT                 | 304 SST NIT                 |
| 10          | Clevis Pin              | 304 SST NIT                 | 304 SST NIT                 |
| 11          | Body Roller             | 304 SST NIT                 | 304 SST NIT                 |
| 12          | Clevis                  | CF8 SST                     | Ductile Iron <sup>3</sup>   |
| 13          | Spring Retainer         | CF8 SST                     | Ductile Iron <sup>3</sup>   |
| 14          | Clevis Set Screw        | 304 SST                     | 304 SST                     |
| 15          | Safety Collar           | 304 SST                     | 304 SST                     |
| 16          | Piston Bolt             | 304 SST                     | 304 SST                     |
| 17          | Springs                 | Chrome Silicon <sup>1</sup> | Chrome Silicon <sup>1</sup> |
| 18          | Tie Rod                 | 304 SST                     | 304 SST                     |
| 19          | Piston Set Screw        | 304 SST                     | 304 SST                     |
| 20          | Wiper Ring              | Option <sup>2</sup>         | Option <sup>2</sup>         |
| 21          | Piston Seal             | Option <sup>2</sup>         | Option <sup>2</sup>         |
| 22          | Piston                  | CF8 SST                     | Ductile Iron <sup>3</sup>   |
| 23          | End Cap Travel Stop     | 304 SST                     | 304 SST                     |
| 24          | Travel Stop Seal        | Option <sup>2</sup>         | Option <sup>2</sup>         |
| 25          | End Cap Travel Stop Nut | 304 SST                     | 304 SST                     |
| 26          | Tie Rod Hex Nut         | 304 SST                     | 304 SST                     |
| 27          | End Cap                 | CF8 SST                     | Ductile Iron <sup>3</sup>   |
| 28          | Cylinder                | 304 SST <sup>2</sup>        | Black Amalgon <sup>2</sup>  |
| 29          | Body Travel Stop        | 304 SST                     | 304 SST                     |
| 30          | Body Travel Stop Nut    | 304 SST                     | 304 SST                     |
| 31          | Body Fastening Nut      | 304 SST                     | 304 SST                     |
| 32          | Body Fastening Bolt     | 304 SST                     | 304 SST                     |
| 33          | Yoke                    | CF8 SST                     | Ductile Iron <sup>3</sup>   |
| 34          | Top Hat Bolt            | 304 SST                     | 304 SST                     |
| 35          | Yoke Seal               | Option <sup>2</sup>         | Option <sup>2</sup>         |
| 36          | Yoke Bushing            | Option <sup>2</sup>         | Option <sup>2</sup>         |

1. "Chrome Silicon springs are powder coated. Stainless Steel springs available.


2. "Option" materials depend on trim code, see engineering string.

3. Ductile iron components are coated or plated for corrosion resistance.

304 or CF8 stainless steel may be upgraded to 316 or CF8M stainless steel based on availability or customer request. Materials shown are standard. Other materials available, contact Bettis for special options. Special coatings, plating, or surface treatments are also available.



## Bettis RGS F-Series Actuator Model Number Matrix

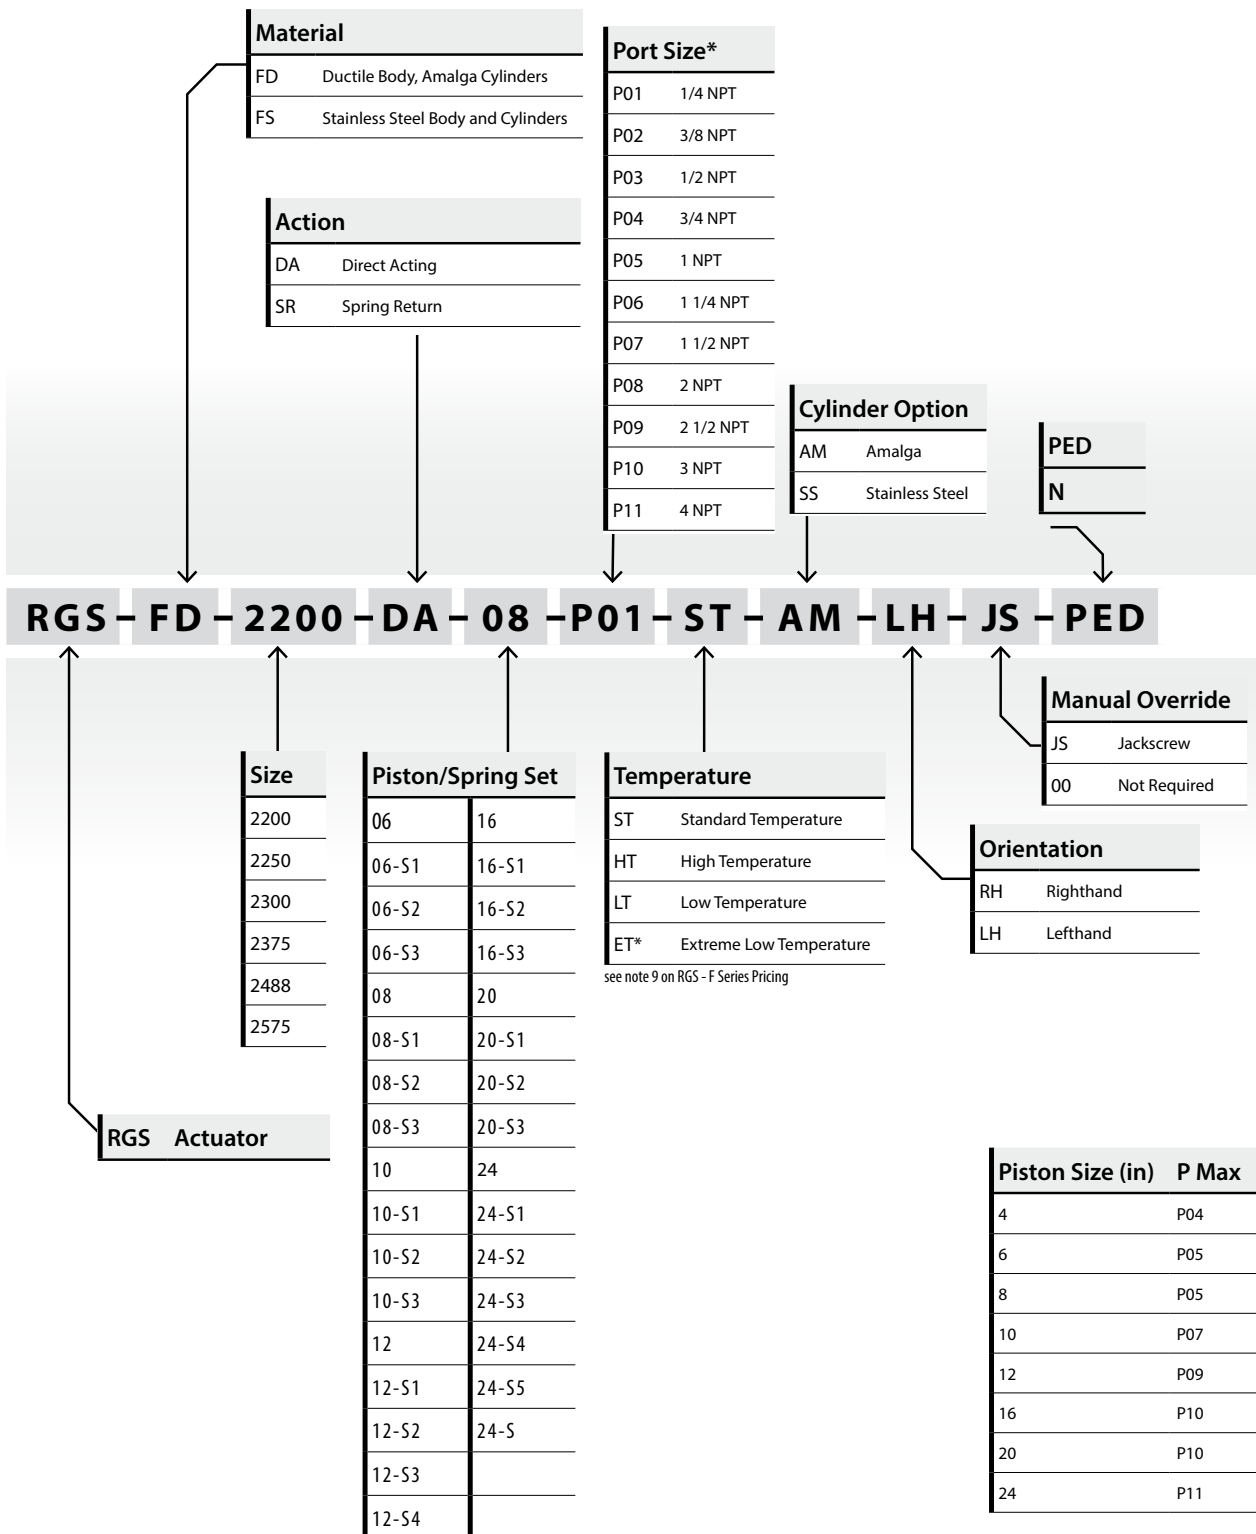

**Notes:**

\* Items are considered standard.

Ensure material compatibility of all components with applications requirements.

**(1)** Environmental temperature requirements may limit the use of certain trim materials. Temperature ranges may be extended with proper insulation. Ductile iron units may be used in low temperature (less than -20°F), but stroke speed should be limited to prevent brittle fracture.

**(2)** Bettis selects the appropriate grease based on application requirements.



**World Area Configuration Centers (WACC) offer sales support, service, inventory and commissioning to our global customers.**

**Choose the WACC or sales office nearest you:**

***NORTH & SOUTH AMERICA***

19200 Northwest Freeway  
Houston TX 77065  
USA  
T +1 281 477 4100

Av. Hollingsworth  
325 Iporanga Sorocaba  
SP 18087-105  
Brazil  
T +55 15 3413 8888

***ASIA PACIFIC***

No. 9 Gul Road  
#01-02 Singapore 629361  
T +65 6777 8211

No. 1 Lai Yuan Road  
Wuqing Development Area  
Tianjin 301700  
P. R. China  
T +86 22 8212 3300

***MIDDLE EAST & AFRICA***

P. O. Box 17033  
Jebel Ali Free Zone  
Dubai  
T +971 4 811 8100

P. O. Box 10305  
Jubail 31961  
Saudi Arabia  
T +966 3 340 8650

24 Angus Crescent  
Longmeadow Business Estate East  
P.O. Box 6908 Greenstone  
1616 Modderfontein Extension 5  
South Africa  
T +27 11 451 3700

***EUROPE***

Holland Fásor 6  
Székesfehérvár 8000  
Hungary  
T +36 22 53 09 50

Strada Biffi 165  
29017 Fiorenzuola d'Arda (PC)  
Italy  
T +39 0523 944 411

For complete list of sales and manufacturing sites, please visit [www.emerson.com/actuationtechnologieslocations](http://www.emerson.com/actuationtechnologieslocations) or contact us at [info.actuationtechnologies@emerson.com](mailto:info.actuationtechnologies@emerson.com)

[www.emerson.com/bettis](http://www.emerson.com/bettis)

©2018 Emerson. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Bettis™ is a mark of one of the Emerson family of companies. All other marks are property of their respective owners.

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

**BETTIS™**



**EMERSON™**