



One piece lug design with extended neck and a concentric disc and seat configuration to allow for 2" - 48" of piping installation. Rated for bubble-tight shutoff for bi-directional service to 232 psi on sizes 2" - 12" and to 145 psi on sizes 14" - 48".

CE/PED certification, NSF/ANSI 61-2008 (Potable Water) Certification, SIL, ABS, Bureau Veritas, DNV

## J Flow Controls **84A Series** Wafer Style Butterfly Valve

### ***FEATURES & BENEFITS***

- | Small in size and light in weight. Easy installation and maintenance. It can be mounted in any direction
- | Simple and compact construction, quick 90° on-off operation
- | Minimized operating torque, energy saving
- | Bubble-tight sealing with no leakage under pressure test
- | Wide selection of materials, applicable for various medium
- | Long service life
- | Flow curve tending to straight line. Excellent performance

### Overview

#### Body:

- One piece lug design with extended neck to allow for 2" - 48" of piping insulation
- Non-corrosive bushing and a self-adjusting stem seat. No field adjustment necessary to maintain optimum field performance

#### Disc:

- Disc edge and hub on metal disc are spherically machined and hand polished for torque and maximum sealing capability

#### Stem:

- One piece design
- Disc to stem connection is a square shaft design with no possible leak paths in the disc-to-stem connection. External disc to stem connections such as disc screws and pins are absent
- Stem is mechanically retained in the body neck and no part of the stem is exposed to the line media

#### Seat:

- Tongue-and-groove seat with primary hub seal and a molded flange O-ring for weld neck and slip-on flanges
- The seat is totally encapsulated isolating it from the line media and no flange gaskets are required



## 84A Series Wafer Style Butterfly Valve

### Overview

#### Max working pressure

2" - 12" 232 psi

Flange PN10, PN16, 150LB

14" - 48"

Flange PN10, PN16, 150LB

#### Design

EN593, API609, BS5155, EN1092, ISO5211

Face to Face

DIN558-1, API609, DIN3202, ISO 5752, BS5155

#### Testing

EN 12266-1, ISO 5208, API598

### Body

Material	References standard	Coating
Stainless Steel	CF8, CF8M, CF3, CF3M, SAF2507, SAF2205	
Aluminum bronze	C9540, C95500, C95800	

### Disc


Material	References standard	Standard Coating
Stainless Steel	CF8, CF8M, CF3, CF3M, SAF2507, SAF2205	
Alloy 20	Alloy 20	

### Body Rubber Seat

References	Desigation	Trade Name	Working temp	Applications
NBR	Nitrile Rubber	BUNA-N	-25/+100	Oils, Hydrocarbons, Gas, Air, Water
EPDM	Copolymer	EPDM	-35/+130	Water, Seat Water, Steam, Diluted Acids
FKM	Fluoroelastomer	Viton	-20/+200	Oils, Hydrocarbons, Acids
CR	Polychloroprene	Neoprene	-20/+100	Alkail, Bases, Water
MR	Natural Rubber	NR	-40/+80	Glycols, Abrasive media
MVQ	Silicon Rubber	SR	-60/+190	Water, Food, Drinks
CSM	Chlorosulfonate Polychloroprene	Hypalon	-20/+125	Acids, Mineral Bases, Alcohols, Hydrocarbons

## 84A Series Wafer Style Butterfly Valve


### Bill of Materials (2" - 3")

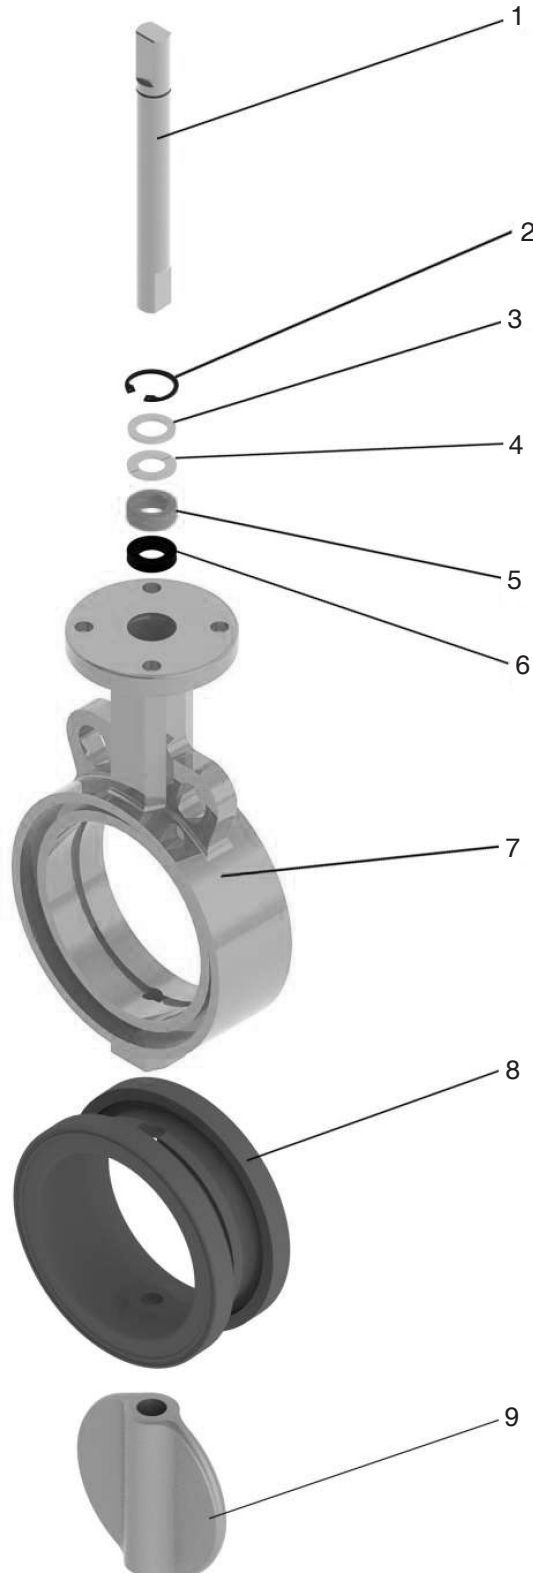

No.	Part Name	Material
1	Shaft	SS410, SS304, SS431, SS316, Monel K500, 17-4PH, C6300, C92200, 2507, 2205
2	Retaining Ring	Sk7
3	Thrust Washer	Stainless Steel, Carbon Steel
4	Shaft Retainer	Stainless Steel, Carbon Steel
5	Bushing	FRP
6	"O" Ring	NBR, Viton
7	Body	304, 316, 316L
8	Body Seat	NBR (BUNA-N), EPDM, HEPDM, FKM (Viton), PTFE, Polychloroprene, Natural Rubber, Silicon Rubber
9	Disc	CF8, CF8M, CF3, CF3M, SAF2507, SAF2205

## 84A Series Wafer Style Butterfly Valve


### Bill of Materials (4" - 12")

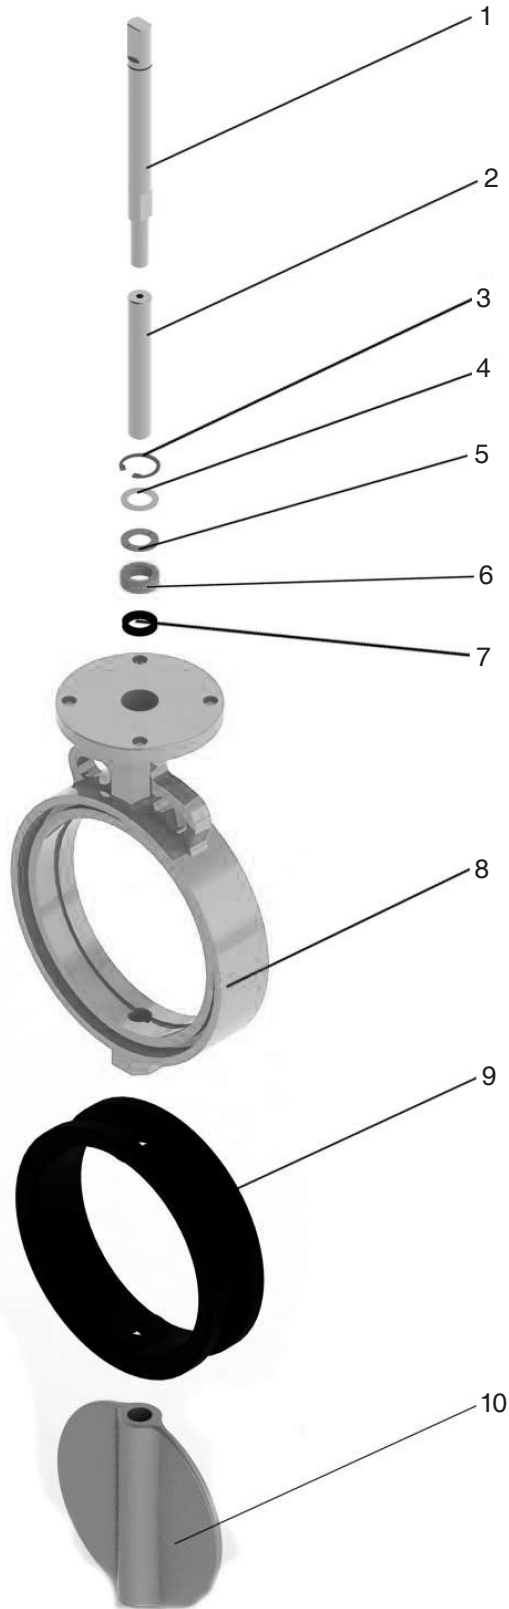

No.	Part Name	Material
1	Up Shaft	SS410, SS304, SS431, SS316, Monel K500, 17-4PH, C6300, C92200, 2507, 2205
2	Up Shaft	SS410, SS304, SS431, SS316, Monel K500, 17-4PH, C6300, C92200, 2507, 2205
3	Retaining Ring	Sk7
4	Thrust Washer	Stainless Steel, Carbon Steel
5	Shaft Retainer	Stainless Steel, Carbon Steel
6	Bushing	FRP
7	"O" Ring	NBR, Viton
8	Body	304, 316, 316L
9	Body Seat	NBR (BUNA-N), EPDM, HEPDM, FKM (Viton), PTFE, Polychloroprene, Natural Rubber, Silicon Rubber
10	Disc	CF8, CF8M, CF3, CF3M, SAF2507, SAF2205

## 84A Series Wafer Style Butterfly Valve


### Bill of Materials (14")

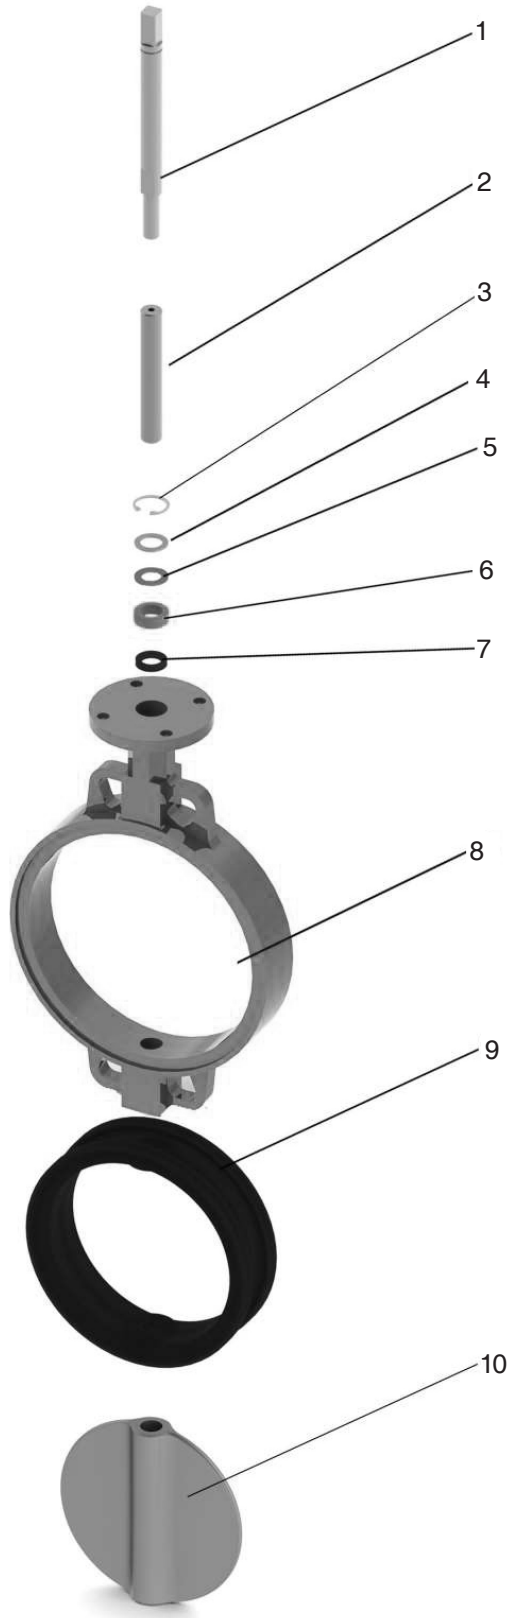

No.	Part Name	Material
1	Up Shaft	SS410, SS304, SS431, SS316, Monel K500, 17-4PH, C6300, C92200, 2507, 2205
2	Up Shaft	SS410, SS304, SS431, SS316, Monel K500, 17-4PH, C6300, C92200, 2507, 2205
3	Retaining Ring	Sk7
4	Thrust Washer	Stainless Steel, Carbon Steel
5	Shaft Retainer	Stainless Steel, Carbon Steel
6	Bushing	FRP
7	"O" Ring	NBR, Viton
8	Body	304, 316, 316L
9	Body Seat	NBR (BUNA-N), EPDM, HEPDM, FKM (Viton), PTFE, Polychloroprene, Natural Rubber, Silicon Rubber
10	Disc	CF8, CF8M, CF3, CF3M, SAF2507, SAF2205

## 84A Series Wafer Style Butterfly Valve


### Dimensions

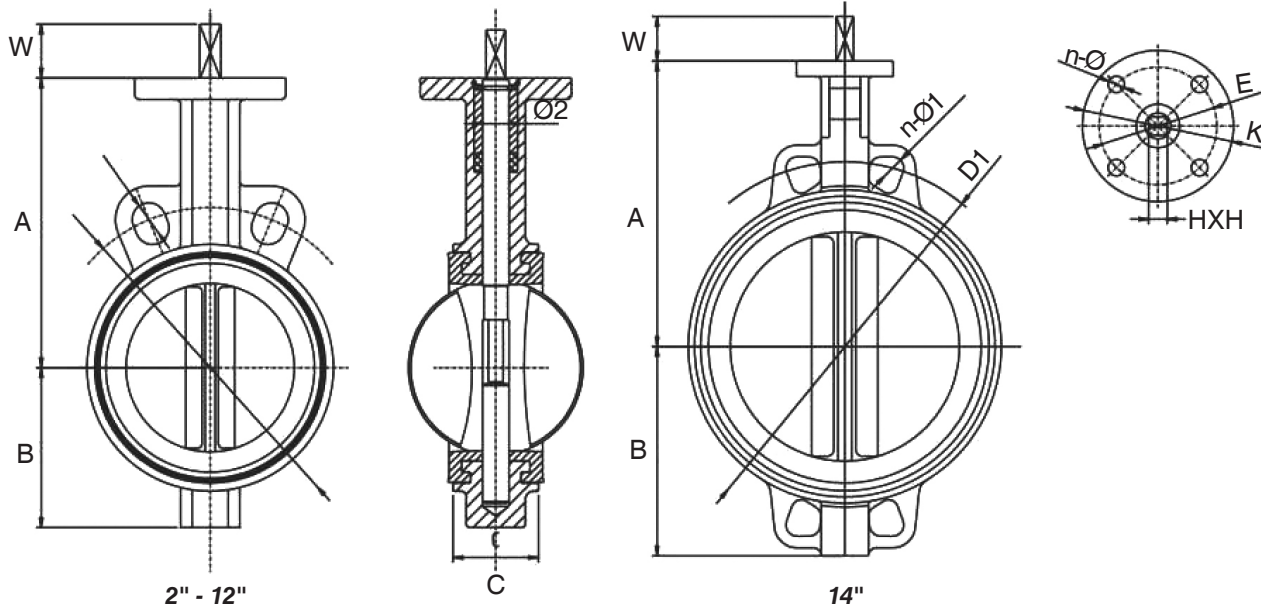

Size	Dimensions									
	A	B	C	Ø2	ISO5211	K	E	n-Ø	HXH	W
2"	5.51	2.40	1.69	0.50	F07	3.54	2.76	0.16-0.39	0.43x0.43	0.55
2-1/2"	5.91	2.68	1.81	0.50	F07	3.54	2.76	0.16-0.39	0.43x0.43	0.55
3"	6.22	2.99	1.81	0.50	F07	3.54	2.76	0.16-0.39	0.43x0.43	0.55
4"	6.93	3.62	2.05	0.62	F07	3.54	2.76	0.16-0.39	0.43x0.43	0.55
5"	7.48	4.21	2.20	0.74	F07	3.54	2.76	0.16-0.39	0.55x0.55	0.67
6"	8.35	4.72	2.20	0.74	F07	3.54	2.76	0.16-0.39	0.55x0.55	0.67
8"	9.29	5.94	2.36	0.87	F10	4.92	4.02	0.16-0.47	0.67x0.67	0.87
10"	10.43	7.32	2.68	1.12	F10	4.92	4.02	0.16-0.47	0.87x0.87	0.87
12"	12.01	8.31	3.07	1.24	F10	4.92	4.02	0.16-0.47	0.87x0.87	0.87
14"	14.49	10.63	3.07	1.24	F10	4.92	4.02	0.16-0.47	0.87x0.87	0.87

## 84A Series Wafer Style Butterfly Valve

### Dimensions

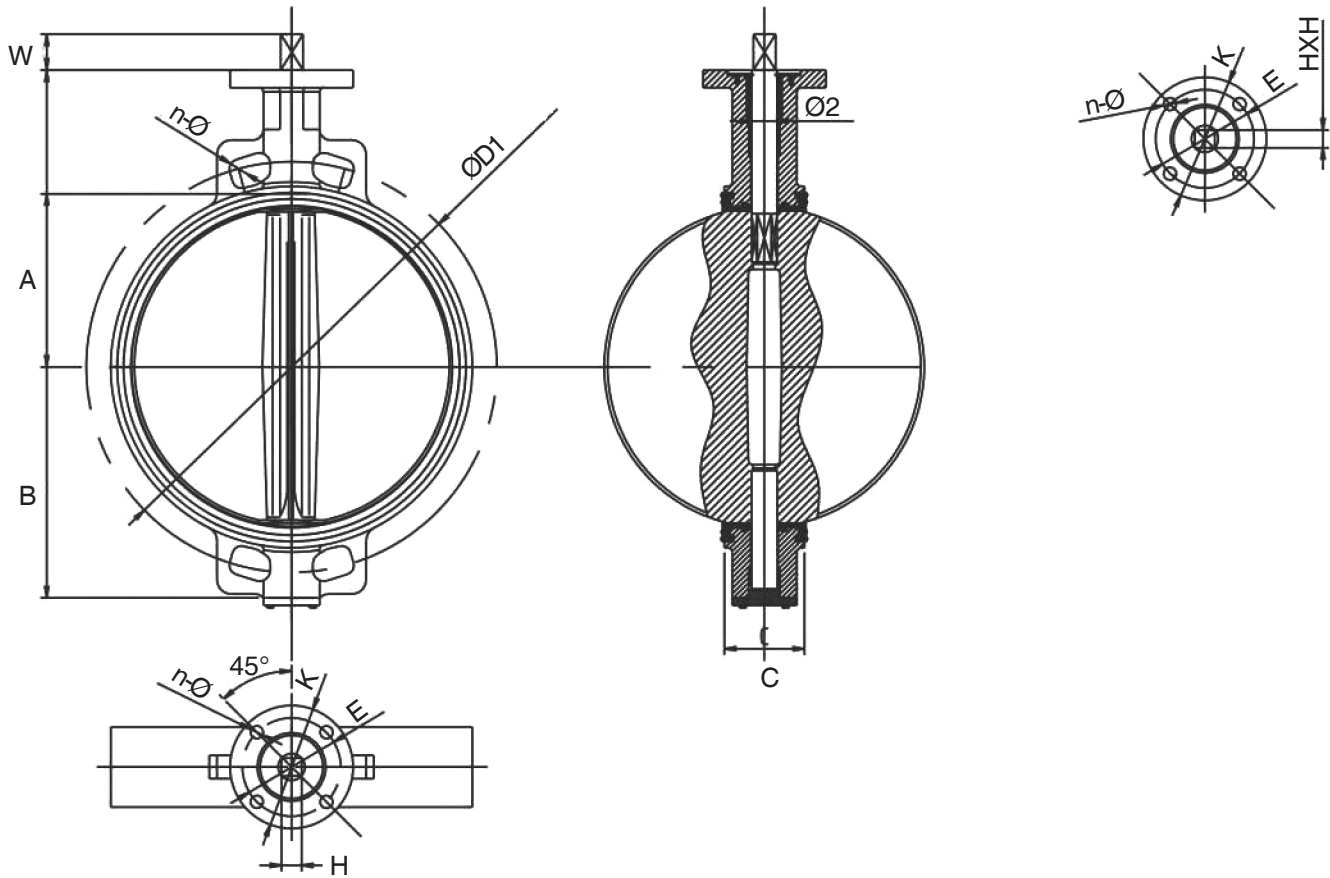


Size	Dimensions									
	A	B	C	Ø2	ISO5211	K	E	n-Ø	HXH	W
2"	5.51	3.15	1.69	0.50	F07	3.54	2.76	0.16-0.39	0.43-0.43	0.55
2-1/2"	5.91	3.50	1.81	0.50	F07	3.54	2.76	0.16-0.39	0.43-0.43	0.55
3"	6.22	3.74	1.81	0.50	F07	3.54	2.76	0.16-0.39	0.43-0.43	0.55
4"	6.93	4.49	2.05	0.62	F07	3.54	2.76	0.16-0.39	0.43-0.43	0.55
5"	7.48	5.00	2.20	0.74	F07	3.54	2.76	0.16-0.39	0.55-0.55	0.67
6"	8.35	5.47	2.20	0.74	F07	3.54	2.76	0.16-0.39	0.55-0.55	0.67
8"	9.25	5.89	2.36	0.87	F10	4.92	4.02	0.16-0.47	0.67-0.67	0.87
10"	10.43	7.99	2.68	1.12	F10	4.92	4.02	0.16-0.47	0.87-0.87	0.87
12"	12.01	9.53	3.07	1.24	F10	4.92	4.02	0.16-0.47	0.87-0.87	0.87
14"	14.49	10.51	3.07	1.24	F10	4.92	4.02	0.16-0.47	0.87-0.87	0.87
16"	15.75	12.20	4.02	1.49	F14	6.89	5.51	0.16-0.71	1.06-1.06	1.42
18"	16.61	13.39	4.49	1.49	F14	6.89	5.51	0.16-0.71	1.06-1.06	1.42
20"	17.40	14.37	5.00	1.80	F14	6.89	5.51	0.16-0.71	1.42-1.42	1.42
24"	22.24	17.80	6.06	1.99	F16	8.27	6.50	0.16-0.87	1.42-1.42	1.81



# 84A Series Wafer Style Butterfly Valve

## Dimensions

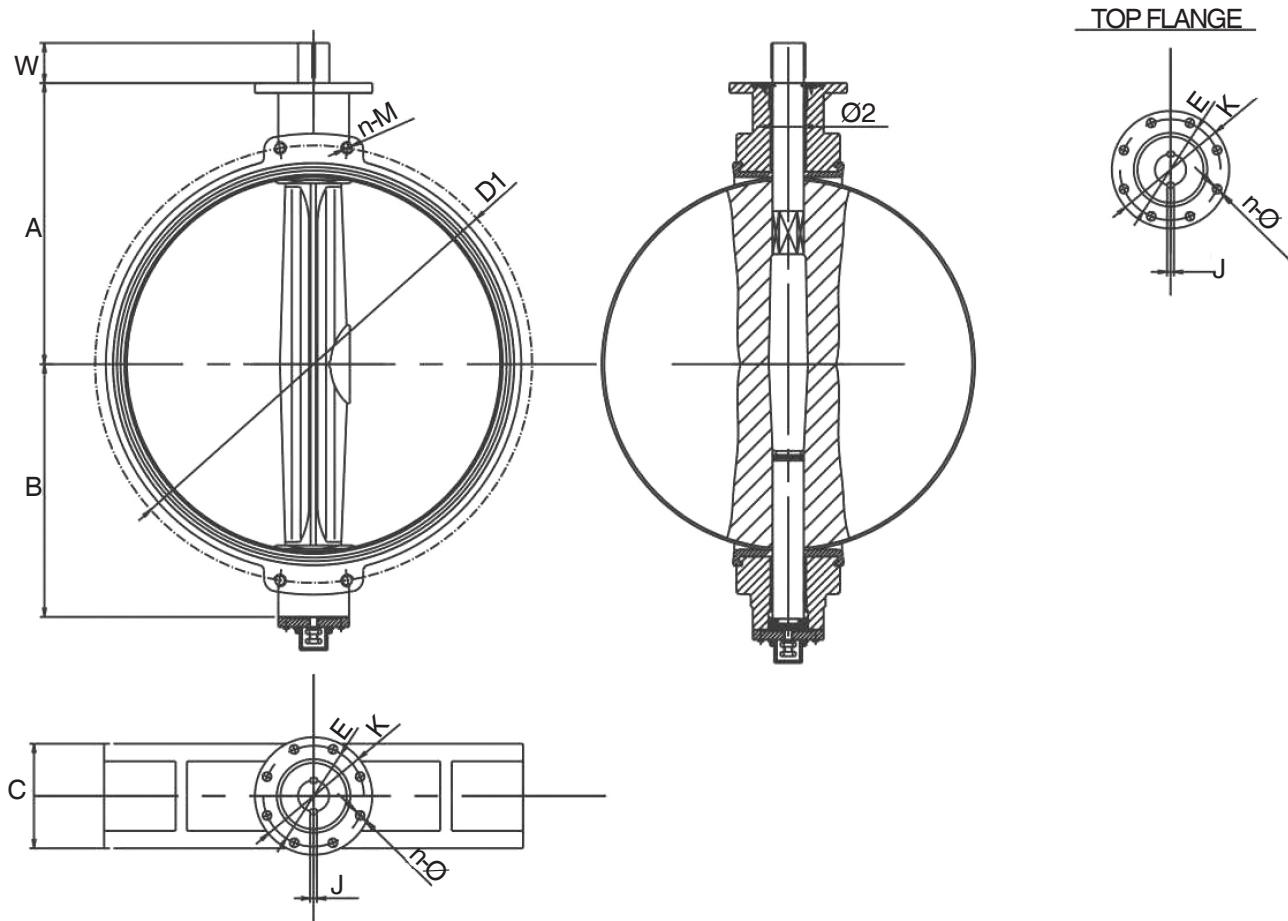

Size	Dimensions									
	A	B	C	Ø2	ISO5211	K	E	n-Ø	J	W
28"	24.57	20.47	6.50	2.49	F25	11.81	10.00	0.31-0.71	0.71	4.33
32"	26.46	22.44	7.48	2.49	F25	11.81	10.00	0.31-0.71	0.71	4.33
36"	28.35	25.04	7.99	2.95	F25	11.81	10.00	0.31-0.71	0.79	4.33
40"	31.69	27.95	8.50	3.35	F25	11.81	10.00	0.31-0.71	0.87	4.33
48"	37.68	33.19	10.87	4.13	F30	13.78	11.73	0.31-0.87	1.10	5.12

## 84A Series Wafer Style Butterfly Valve

### Application in Water


Size	EPDM			Size	Viton / NBR / PTFE		
	6 Bar	10 Bar	16 Bar		6 Bar	10 Bar	16 Bar
	wet (N.m)	wet (N.m)	wet (N.m)		wet (N.m)	wet (N.m)	wet (N.m)
1-1/2"	7	9	9	1-1/2"	9	12	12
2"	8	9	10	2"	10	12	13
2-1/2"	13	15	17	2-1/2"	17	20	22
3"	19	21	26	3"	25	27	34
4"	33	37	43	4"	43	48	56
5"	51	57	65	5"	66	74	85
6"	80	94	103	6"	104	122	134
8"	140	171	206	8"	182	222	268
10"	216	264	299	10"	280	343	389
12"	299	402	417	12"	389	523	542
14"		519	782	14"		675	1017
16"		757	1224	16"		984	1591
18"		1054	1513	18"		1370	1967
20"		1420	1879	20"		1846	2443
24"		2176	3383	24"		2829	4398
28"		3162	4182	28"		4111	5437
32"		4794	6664	32"		6232	8663
36"		6503	8296	36"		8454	10785
40"		8330	11526	40"		10829	14984
48"		14280	18020	48"		18564	23426

**NOTICE:**

The above torque data based on 77°F purified water, not included safety factor

# 84A Series Wafer Style Butterfly Valve

## Flow Rate Calculation

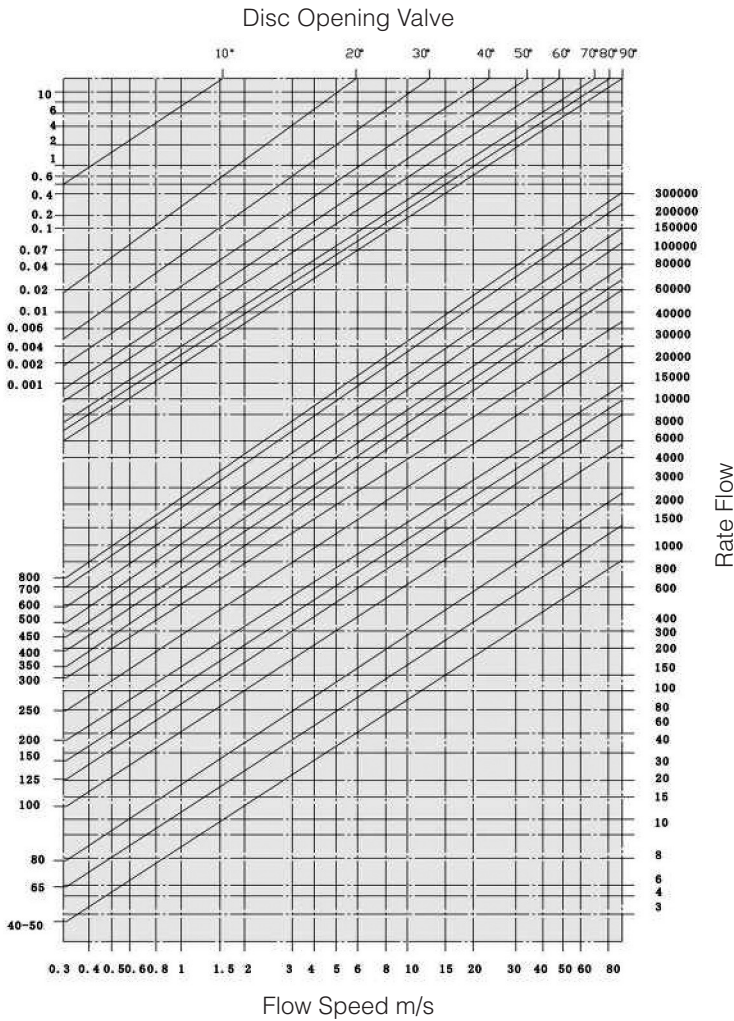

Note: Values indicated in this page is for information purposes

Liquids  $Q = \frac{KV}{\sqrt{\frac{PS}{\Delta P}}}$

Q rate of flow (m<sup>3</sup>/h)  
 PS specific gravity (water=1)  
 ΔP pressure drop (bar)

Gas  $Q = 28.5 \frac{KV}{\sqrt{\frac{PS}{P_2 \Delta P}}}$

Q rate of flow (m<sup>3</sup>/h)  
 PS specific gravity (water=1)  
 ΔP pressure drop (bar)  
 (less than 1/2 inlet pressure)  
 P<sub>2</sub> outlet pressure

Steam  $Q = 22.5 \frac{Kv \sqrt{P_2 \Delta P}}{\Delta P}$

Q rate of flow (Kg/h)  
 ΔP pressure drop (bar)  
 (less than 1/2 inlet pressure)  
 P<sub>2</sub> outlet pressure

Calculation of the rate of flow equivalent to H<sub>2</sub>O

For different liquid, gas or steam head losses are determined by equivalent water of flow, as follows:

- Q<sub>e</sub> equivalent water flow (mc/l o l/s)
- Q fluid flow (mc/l o l/s)
- d fluid specific gravity (Kg/mc)


## 84A Series Wafer Style Butterfly Valve

### *Cv Values*


Size	Flow in Gpm@ 1 PSI P@ Various Disc Angles								
	10°	20°	30°	40°	50°	60°	70°	80°	90°
2"	0.1	5	12	24	45	64	90	125	135
2-1/2"	0.2	8	20	37	65	98	144	204	220
3"	0.3	12	22	39	70	116	183	275	302
4"	0.5	17	36	78	139	230	364	546	600
5"	0.8	29	61	133	237	392	620	930	1022
6"	2	45	95	205	366	605	958	1437	1579
8"	3	89	188	408	727	1202	1903	2854	3136
10"	4	151	320	694	1237	2047	3240	4859	5340
12"	5	234	495	1072	1911	3162	5005	7507	8250
14"	6	338	715	1549	2761	4568	7230	10844	11917
16"	8	464	983	2130	3797	6282	9942	14913	16388
18"	11	615	1302	2822	5028	8320	13168	19752	21705
20"	14	971	1674	3628	6465	10698	16931	25396	27908
24"	22	1222	2587	5605	9989	16528	26157	39236	43116
28"	30	1633	3522	7630	12599	20036	30482	46899	58696
32"	45	2387	4791	8736	13786	20613	31395	48117	68250
36"	60	3021	6063	11055	17449	26086	39731	60895	86375
40"	84	4183	8395	15307	24159	36166	55084	84425	119750
48"	102	4651	10365	17010	27242	43853	70431	108968	132888

## 84A Series Wafer Style Butterfly Valve


### Installation

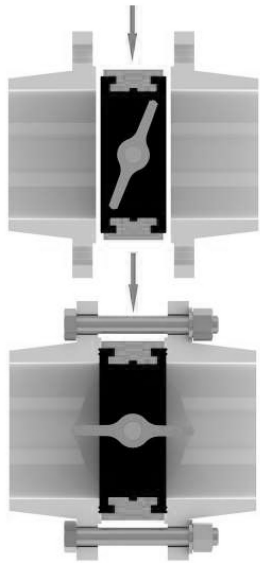


1. Leave a space between flanges so that valve can be easily inserted and removed and move the valve in accordance with the arrow



2. Open completely the valve before tightening flanges



3. Tighten bolts until flanges are in contact with valve body



4. NOTE: do not insert other packing between flange and valve

NOTE: Weld the pipe only in spots with the valve between flanges. Remove the valve before finishing the welding to avoid that heat damaging the seat. Clean welding carefully to avoid that slags damage the seat.

### Installation for powders and muddy fluids




- Wrong  
Vertical rotation axis




- Right  
Horizontal rotation axis

### End piping installation

When valves are installed at the end of piping, a counterflange as per drawing type B is needed to secure tightness at max pressure. Please notice the order when the valves are installed as per drawing type A.



- Type A installation without end piping




- Type B installation with end piping

Pressure max: Type A installation is 174 psi; Type B installation is 232 psi

## 84A Series Wafer Style Butterfly Valve

### Length & Quantity of Bolts for Valve Installation

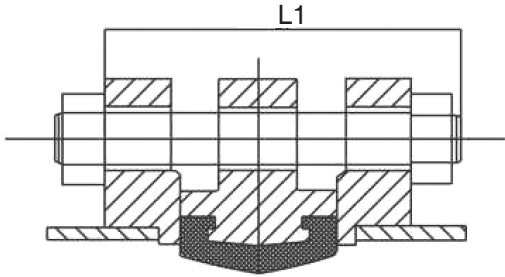


Bolt Connection of Wafer Butterfly Valve

Size	1.0Mpa			1.6Mpa		
	Stud Bolt for Type of Wafer Valve			Stud Bolt for Type of Wafer Valve		
	Qty	Dia xL1	Length	Qty	Dia xL1	Length
2"	4	M16x110	130	4	M16x110	130
2-1/2"	4	M16x120	140	4	M16x120	140
3"	8	M16x120	140	8	M16x120	140
4"	8	M16x130	150	8	M16x130	150
5"	8	M16x130	150	8	M16x130	150
6"	8	M20x140	165	8	M20x140	165
8"	8	M20x150	175	12	M20x150	175
10"	12	M20x160	185	12	M24x160	185
12"	12	M20x170	195	12	M24x170	195
14"	16	M20x170	195	16	M24x170	195
16"	16	M24x190	220	16	M27x190	220
18"	20	M24x220	250	20	M27x220	250
20"	20	M24x260	290	20	M30x260	290
24"	20	M27x290	324	20	M33x290	324
28"	24	M27x290	324	24	M33x290	324
32"	24	M30x320	356	24	M36x320	356
36"	28	M30x340	376	28	M36x340	376
40"	28	M33x360	400	28	M39x360	400
48"	32	M36x430	476	32	M45x430	476

## 84A Series Wafer Style Butterfly Valve

### Length & Quantity of Bolts for Valve Installation

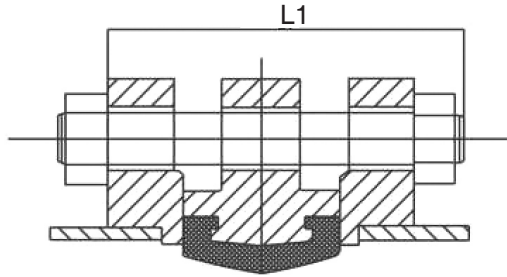

Bolt Connection of Wafer Butterfly Valve

Size	150 LB		
	Stud Bolt for Type of Wafer Valve		
	Qty	Dia xL1	Length
2"	4	5/8"x110	130
2-1/2"	4	5/8"x120	140
3"	4	5/8"x120	140
4"	8	3/4"x130	150
5"	8	3/4"x130	150
6"	8	3/4"x140	165
8"	8	3/4"x150	175
10"	12	7/8"x160	185
12"	12	7/8"x170	195
14"	12	1"x170	195
16"	16	1"x190	220
18"	16	9/8"x220	250
20"	20	9/8"x260	290
24"	20	5/4"x290	324
28"	28	5/4"x290	324
32"	28	3/2"x320	356
36"	32	3/2"x340	376
40"	36	3/2"x360	400
48"	44	3/2"x430	470



J Flow Controls®  
 4665 Interstate Drive  
 Cincinnati, OH 45246  
 513-731-2900  
 jflowcontrols.com

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or a guarantee of satisfactory results. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because J Flow Controls® is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice.